

Kanaflex®


SERIES 150CL IS EXTREMELY FLEXIBLE AND LIGHTWEIGHT.
THE BEST HOSE TO DO THE JOB RIGHT.



Economical . . . initial cost is low, and Kanaflex is almost maintenance-free, to save you money in the long run.

Lightweight . . . easier to handle and less expensive to transport.

Clear side wall . . . for monitoring product flow.

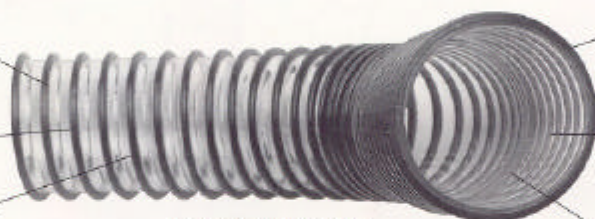

7" ID AVAILABLE AS
STANDARD STOCK ITEM

Weatherproof . . . Kanaflex is highly resistant to temperature changes and deterioration by sun, ozone or mildew.

Smooth bore . . . combined with smooth bending characteristics, makes for the fastest, most efficient transfer of fluids.

Extremely flexible . . . lends itself to working in tight spaces.

Kanaflex SERIES 150CL SPECIFICATIONS:

INSIDE DIAMETER Inches	OUTSIDE DIAMETER Inches	PITCH, Inches	MIN. BENDING RADIUS 72° F, Inches	WORKING PRESSURE 72° F, P.S.I.	BURSTING PRESSURE 72° F, P.S.I.	VACUUM RATING 72° F, In./Hg.	WEIGHT Lbs./Ft.
2-1/2	2.74	0.43	2.5				0.37
3	3.37	0.47	3.0				0.49
4	4.43	0.57	4.0				0.71
5	5.59	0.79	5.0				1.05
6	6.53	0.79	6.0				1.29
7	7.39	0.54	7.0				1.38
8	8.55	0.89	8.0				1.71

Above specifications can be modified.
Series 155 for heavy duty applications is available.

Kanaflex®
CORPORATION
800 Woodlands Parkway

DISTRIBUTED BY:

GOODYEAR
RUBBER PRODUCTS INC.

Call Toll Free: **1-866-711-4673**

WebSales@GoodyearRubberProducts.com

**We Ship
World Wide**