


Kanaflex®

630 ED, 660 YD

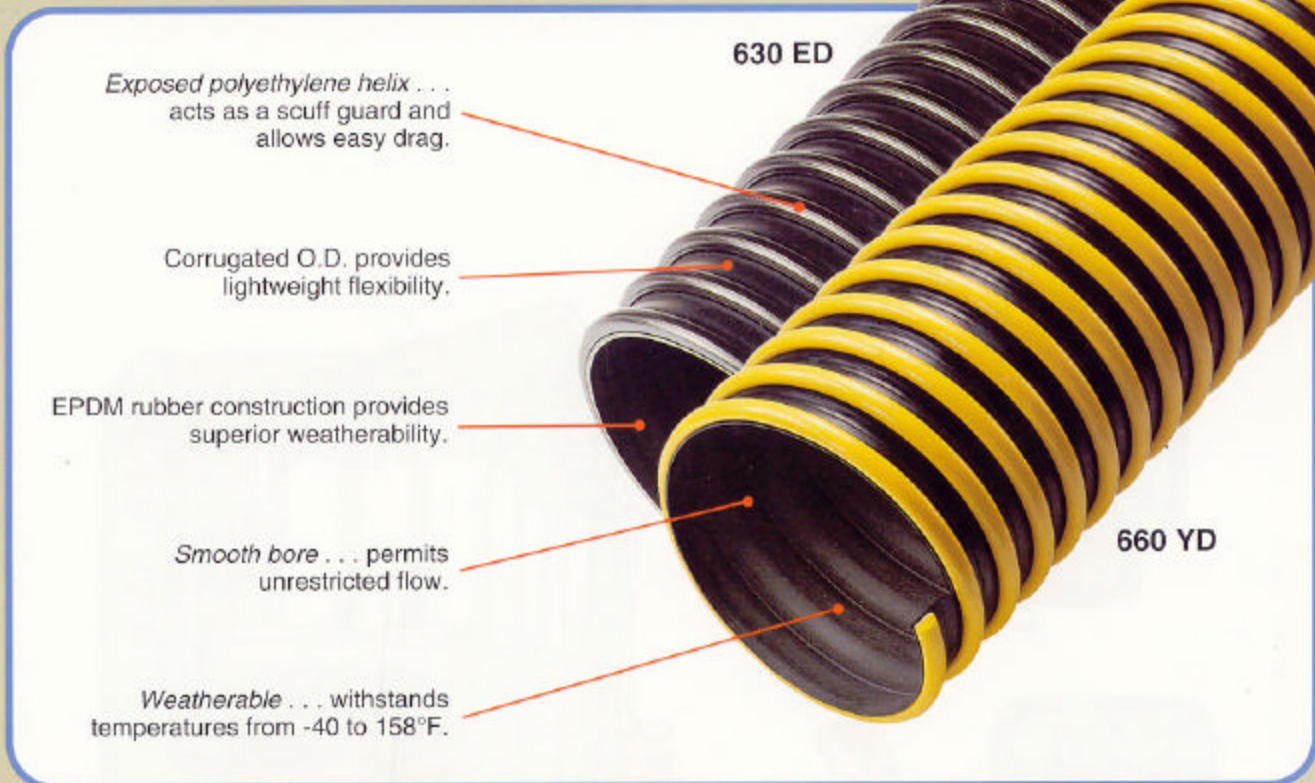

SPECIFICATIONS

630 ED

SIZE	OUTSIDE DIAMETER Inches	PITCH Inches	MIN. BENDING RADIUS 72°F, Inches	WEIGHT Lbs. / Ft.
2"	2.36	0.39	3.5	.31
2½"	2.89	0.56	3.5	.38
3"	3.46	0.59	4.0	.49
4"	4.53	0.67	4.0	.76
6"	6.50	0.85	6.0	1.00
8"	8.46	0.92	8.0	1.37

660 YD

4"	4.58	0.67	4.0	0.79
5"	5.53	0.87	5.0	0.85
6"	6.61	0.87	6.0	1.26
8"	8.78	0.90	8.0	1.92
10"	10.63	1.04	10.0	2.38

Kanaflex®
CORPORATION

800 Woodlands Parkway
Vernon Hills, IL 60061

DISTRIBUTED BY:

GOODYEAR
RUBBER PRODUCTS INC.

Call Toll Free: **1-866-711-4673**

WebSales@GoodyearRubberProducts.com

**We Ship
World Wide**