


**#65 PVC 120 Black Cover x Friction Surface**

Proven belt for long wearing, high performance, problem free package handling applications. Smooth coated top surface resists oil, grease, and chemicals. Ideal for a variety of roller / slider bed applications. Characteristics include low stretch, high strength, good fastener retention, with superior rip, tear, and gouge resistance.

**Temperature range:** 20° F to 180° F. **Thickness:** 9/64". **Weight:** .075 piw.  
**Minimum pulley diameter:** 2". **Recommended fasteners:** #1 Hook, #125 Staple, #15 Alligator.  
**Part Number: 20035501**

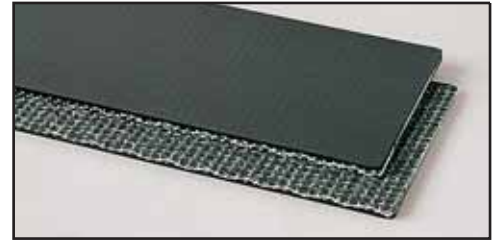

**#65A PVC 120 Black Oil Resistant x Friction Surface**

This special purpose PVC belt provides excellent service where static conductivity and increased oil resistance is required. Belt also maintains flexibility in lower temperatures and is an ideal choice for conveying oily parts.

**Temperature range:** 20° F to 180° F. **Thickness:** 9/64". **Weight:** .075 piw.  
**Minimum pulley diameter:** 2". **Recommended fasteners:** #1 Hook, #125 Staple, #15 Alligator.  
**Part Number: 20035502**



**#65B PVC 100 Black Oil Resistant x Friction Surface**

This specially compounded PVC belt has increased temperature and oil resistance, with static conductive properties. Thin, yet strong and flexible, this belt is ideal in many agricultural applications and for general purpose conveying. Used on slider bed conveyors, for handling light duty applications of small products.

**Temperature range:** 20° F to 180° F. **Thickness:** 7/64". **Weight:** .070 piw.  
**Minimum pulley diameter:** 2". **Recommended fasteners:** #1SP Hook, #62 Staple, #7 Alligator.  
**Part Number: 20035499**



**#66 PVC 120 Black Cover x Cover**

Proven belt for long wearing, high performance, problem free package handling applications. Ideal for moving pelletized fertilizers and small to medium sized product loads. Also used for a variety of roller bed and troughed applications. Characteristics include low stretch, high strength, good fastener retention, with superior rip, tear, and gouge resistance.

**Temperature range:** 20° F to 180° F. **Thickness:** 11/64". **Weight:** .090 piw.  
**Minimum pulley diameter:** 2 1/2". **Recommended fasteners:** #2 Hook, #125 Staple, #20 Alligator.  
**Part Number: 20035500**



**#66A PVC 150 Black Oil Resistant Cover x Cover**

Proven belt for long wearing, high performance, problem free material handling applications. Ideal for moving bulk materials, chemicals, fertilizers, and moderate sized product loads. Ideal for a variety of roller bed and troughed applications. Characteristics include low stretch, high strength, good fastener retention, with superior rip, tear, and gouge resistance.

**Temperature range:** 20° F to 180° F. **Thickness:** 13/64". **Weight:** .100 piw.  
**Minimum pulley diameter:** 4". **Recommended fasteners:** #3 Hook, #125 Staple, #25 Alligator.  
**Part Number: 20038199**



**#67 PVC 150 Black Cover x Friction Surface**

Very popular medium duty PVC belt proven for long wearing, high performance, and problem free material handling. Ideal for a variety of slider / roller bed applications. Accommodates fertilizers, chemicals, and bulk materials. Characteristics include low stretch, high strength, good fastener retention, with superior rip, tear, and gouge resistance.

**Temperature range:** 20° F to 180° F. **Thickness:** 11/64". **Weight:** .100 piw.  
**Minimum pulley diameter:** 3". **Recommended fasteners:** #2 Hook, #125 Staple, #20 Alligator.  
**Part Number: 20038200**

