


#244 ATI 150 Black Urethane x Friction Surface

Very popular medium duty urethane belt proven for long wear, high performance and problem free material handling. Ideal for a variety of roller/slider bed applications. Oil resistant, accommodates fertilizers, chemicals, bulk materials, grain and packaging.

Temperature range: 20° F to 180° F. **Thickness:** 3/16". **Weight:** .090 piw. **Minimum pulley diameter:** 2 1/2". **Recommended fasteners:** #125 Staple, #20 Alligator.

Part Number: 20040550

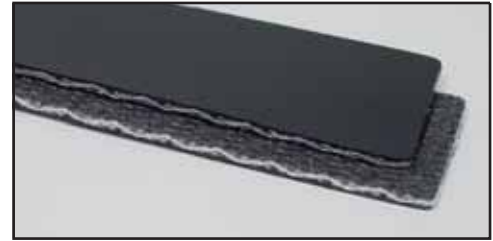

#249 2 Ply Green Urethane x IMPG Static Conductive

A thin urethane belt with excellent cut and gouge resistance, as well as good release characteristics. Excellent food and material handling specification, it is also a good choice for stall/accumulating applications. Smooth antistatic urethane cover is abrasion resistant, non-marking, and meets FDA requirements.

Temperature range: 20° F to 180° F. **Thickness:** 1/16". **Weight:** .025 piw. **Minimum pulley diameter:** 5/8". **Recommended fasteners:** #25 LP, Hot vulcanized finger splice, Cold bond bias step splice.

Part Number: 24041050




#250 2 Ply Green PVC Roughtop x Bare Back

This roughtop textured PVC belt has an abrasion resistant super-grip surface that enables packages, boxes, cases, and other products to be conveyed on both inclines and declines. Special low noise cover design allows the belt to run quieter on return idlers.

Temperature range: 20° F to 180° F. **Thickness:** 7/32". **Weight:** .077 piw. **Minimum pulley diameter:** 2 1/2". **Recommended fasteners:** #25 LP, 36LL, 62 Staple, Hot vulcanized finger splice, Cold bond bias step splice.

Part Number: 24041070

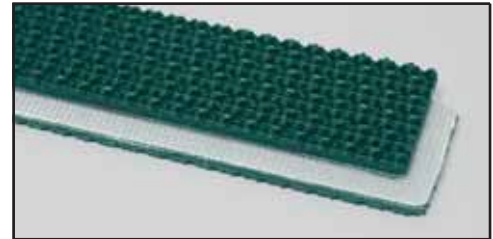

#251 2 Ply Black PVC x Bare Back Static Conductive

This roughtop textured PVC belt has an abrasion resistant super-grip surface that enables packages, boxes, cases, and other products to be conveyed on both inclines and declines. Special low noise cover design allows the belt to run quieter on return idlers.

Temperature range: 20° F to 180° F. **Thickness:** 3/32". **Weight:** .042 piw. **Minimum pulley diameter:** 1 1/2". **Recommended fasteners:** #25 LP, UCM36 SP, Hot vulcanized finger splice, Cold bond bias step splice.

Part Number: 24041090




#229 2 Ply Green PVC Static Conductive x Bare Back

All around general use conveying with low noise back side. High grade static conductive PVC cover is excellent for resistance to cuts, abrasions, vegetable oils, mineral oils, and animal fats. Excellent for flat slide or roller bed use.

Temperature range: 20° F to 180° F. **Thickness:** 5/64". **Weight:** .040 piw. **Minimum pulley diameter:** 1 5/8". **Working tension at 1% tension:** 86 lbs. piw. **Recommended fasteners:** #25 LP Hook, #62 Staple, #1 Alligator.

Part Number: 24009752

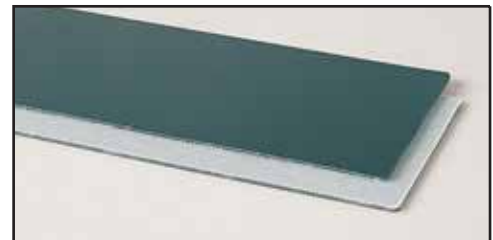

#223 2 Ply White Urethane x IMPG Bottom Static Conductive

High quality smooth, non-adhesive urethane top cover. Ideally suited for food conveying and processing. Hard cover with good release characteristics for sticky material. Monofilament polyester carcass with anti-static properties that are excellent for flat slide bed and roller conveyors. FDA/USDA approved.

Temperature range: 20° F to 180° F. **Thickness:** 1/16". **Weight:** .025 piw. **Minimum pulley diameter:** 1/2". **Working tension:** 46 lbs. piw. **Recommended fasteners:** #2SP Hook, #00 Alligator, UCM36 SP.

Part Number: 24041040

