


## DUROWALL™ CORRUGATED SIDEWALL

Appropriately named for its engineered durability, our Durowall™ sidewall belting consists of two corrugated sidewalls bonded to a base belt. This makes it possible to design a steep angle conveyor system that will move a far greater volume of bulk material at any angle of inclination. Depending on the types of cleats and height of the sidewalls, you can actually move product at angles up to and including 90°. With Durowall™ sidewall belting, conveyors can be designed in almost any conceivable configuration and to fit in even the most confined areas. Instead of having to transfer material from one conveyor to another, Apache's Durowall™ sidewall belting simply changes the planes of travel. Save valuable space and eliminate spillage and loss that occurs at transfer points by using corrugated Durowall™ sidewall belting.

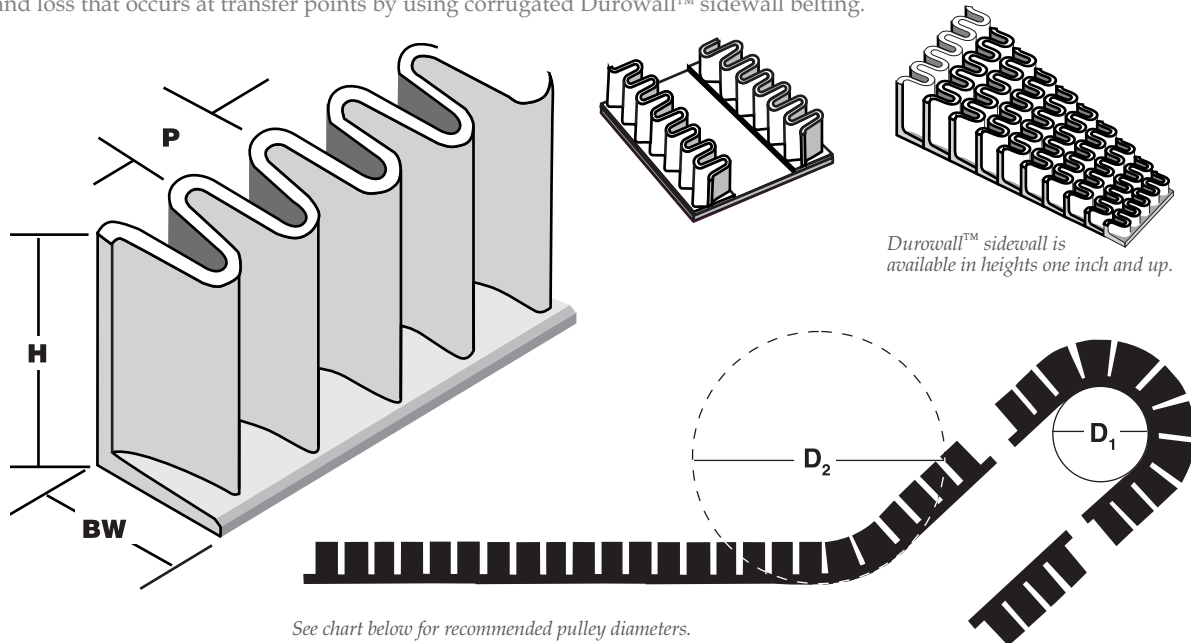

### Durowall™ Corrugated Sidewalls

Height (H)	Base Width (BW)	Pitch (P)	Weight Per Foot/Lbs	Cleat Height (Recommended)	D <sub>1</sub> (Standard Black)	D <sub>1</sub> (All Other Compounds)	D <sub>2</sub>
1"	1 1/2"	7/8"	.35	—	2"	6"	8"
1 1/2"	1 1/2"	7/8"	.50	1"	3"	6"	8"
2"	2"	1 1/4"	.80	1 1/2"	4"	8"	10"
2 1/2"	2"	1 5/8"	.95	2"	6"	10"	12"
3"	2"	1 5/8"	1.10	2 1/2"	8"	12"	16"
4"	2"	1 5/8"	1.40	3 1/2"	10"	14"	18"
5"	2"	1 5/8"	1.75	4 1/2"	12"	16"	20"
6"	2"	1 5/8"	2.20	5 1/2"	14"	20"	24"

### Durowall™ Fabric Reinforced Corrugated Sidewalls

Height (H)	Base Width (BW)	Pitch (P)	Weight Per Foot/Lbs	Cleat Height (Recommended)	D <sub>1</sub> (Standard Black)	D <sub>1</sub> (All Other Compounds)	D <sub>2</sub>
6"	3"	2 7/16"	3.0	5 1/2"	14"	20"	24"
8"	3"	2 7/16"	4.3	7 1/2"	16"	20"	32"
10"	3"	2 7/16"	5.5	9 1/2"	20"	24"	40"
12"	3"	2 7/16"	6.8	11 1/2"	24"	30"	48"

Rubber compounds available: black standard, black oil resistant, black static conducting, black (MSHA), black heat resistant (350°), and white (FDA).

Note: Larger sizes are available upon request.