

ULTRA-LOK™



Revolutionary Strength, Versatility and Reliability


Ultra-Lok is the ultimate band clamping system. It includes a complete selection of convenient preformed clamps, a series of versatile free-end lengths and a choice of fast, powerful application tools.

Whatever your requirements, Ultra-Lok provides a fast, accurate, consistent clamp made from 1/4 hard, high-tensile 201 stainless steel for unequalled strength and reliability.

Preformed or free-end, the powerful, portable UL9010 tool lets you apply clamps anywhere there's an AC outlet and our new IT9000 bench tool has no equal when it comes to accuracy and repeatability.


The rechargeable, battery-powered UL4000 tool is ideal for portable requirements.

Ultra-Lok's smooth I.D. seals assemblies tight with a gap-free, 360° seal and the electric tools quickly form the patented Ultra-Lok for consistent, reliable clamping.

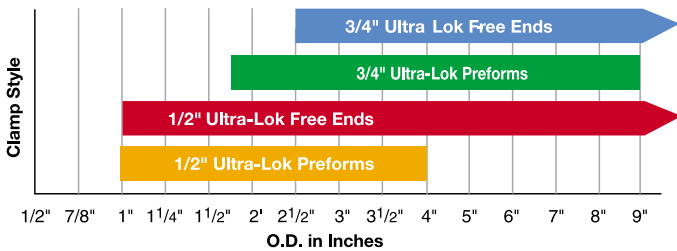

Patented, Smooth I.D. Buckle Design

Ultra-Lok clamps made of Type 201, 1/4 hard stainless steel for superior strength and corrosion resistance

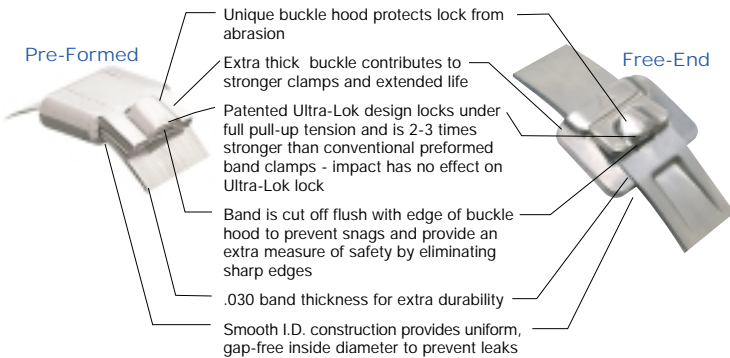

Ultra-Lok Free End Buckles

Type 201 Stainless Steel

Cat. No.	Description	Pkg. Qty.	Weight Lbs	Weight Kg
◆UB256	Used to form 3/4" Ultra-Lok Free-End Clamps	100	3.7	1.7
◆UB254	Used to form 1/2" Ultra-Lok Free-End Clamps	100	2.4	1.1

Ultra-Lok Tools

Cat. No.	Description	Pkg. Qty.	Weight Lbs	Weight Kg
UL4000	Ultra-Lok Cordless Tool (complete)	1	14.6	6.64
UL9010	Ultra-Lok Electric Tool	1	18.3	8.32
ULK200	Adapter Kit 1/2"-3/4" Blade Kit Replacement	1	.07	.03
MO9387	1/2" Shear Plate for 1/2" UL Clamps	1	.01	-

Ultra-Lok Smooth I.D. Preformed Clamps*

Type 201 1/4 Hard Stainless Steel Band Thickness: .030" (.76mm)

Cat. No.	Clamp I.D. In.	Clamp I.D. mm	Band Width In.	Band Width mm	Pkg. Lbs.	Pkg. Kg.	Pkg. Qty.
◆UL279	1 1/2	38.1	1/2	12.7	9.1	4.1	100
◆UL283	2	50.8	1/2	12.7	10.6	4.8	100
◆UL286	2 3/4	69.9	1/2	12.7	12.7	5.8	100
◆UL291	4	101.6	1/2	12.7	16.7	7.6	100
◆UL227	2	50.8	3/4	19.1	14.9	6.8	100
◆UL210	2 3/4	69.9	3/4	19.1	9.2	4.2	50
◆UL211	3	76.2	3/4	19.1	9.7	4.4	50
◆UL212	3 1/2	88.9	3/4	19.1	10.8	4.9	50
◆UL213	4	101.6	3/4	19.1	6.1	2.8	25
◆UL214	4 1/2	114.3	3/4	19.1	6.7	3.0	25
◆UL215	5	127.0	3/4	19.1	7.2	3.3	25
◆UL270	5 1/4	139.7	3/4	19.1	7.3	3.3	25
◆UL216	6	152.4	3/4	19.1	8.2	3.7	25
◆UL217	6 1/2	165.1	3/4	19.1	10.2	4.6	25
◆UL218	7	177.8	3/4	19.1	10.6	4.8	25
◆UL219	8	203.2	3/4	19.1	11.0	5.0	25
◆UL228	9	228.6	3/4	19.1	5.5	2.5	10

Ultra-Lok Free End Clamps*

Type 201 1/4 Hard Stainless Steel Band

Band Width: 3/4" (19.1 mm)

Cat. No.	Sgl. Wrap In.	Sgl. Wrap mm	Dbl. Wrap In.	Dbl. Wrap mm	Length Bands/Tote		Weight		
					In.	mm	Qty.	Lbs	Kg
◆UL2020	4.8	121.9	2.3	58.4	20	508	30	4.3	2.0
◆UL2024	5.5	139.7	2.6	66.0	24	610	25	4.3	2.0
◆UL2028	6.0	152.4	3.5	88.9	28	711	21	4.2	2.0
◆UL2036	9.9	251.5	4.8	121.9	36	914	33	8.1	3.7
◆UL2052	15.0	381.0	7.3	185.4	52	1321	23	8.2	3.7

Sizes above 36" are in 100' rolls. Smaller sizes are in 50' rolls.

Other sizes available up to 120" - call Denver

Band Width: 1/2" (12.7mm)

Cat. No.	Sgl. Wrap In.	Sgl. Wrap mm	Dbl. Wrap In.	Dbl. Wrap mm	Length Bands/Tote		Weight		
					In.	mm	Qty.	Lbs	Kg
UL1018	3.0	76.2	-	-	18	457	50	4.1	1.9
UL1024	5.0	127.0	-	-	24	610	50	5.3	2.4
UL1028	6.0	152.4	3.0	76.2	28	711	50	6.4	2.9
UL1032	7.0	177.8	3.5	88.9	32	813	50	7.2	3.3
UL1036	8.0	203.2	4.0	101.6	36	914	50	8.0	3.6
UL1046	11.0	279.4	5.5	139.7	46	1168	25	5.9	2.7
UL1056	14.0	355.6	7.0	177.8	56	1422	25	7.1	3.2
UL1070	18.0	457.2	9.0	228.6	70	1778	25	8.5	3.9
UL1086	22.0	558.8	11.0	279.4	86	2184	25	10.2	4.6
UL1096	25.0	635.0	12.5	317.5	96	2438	25	11.2	5.1
UL1106	28.0	711.2	14.0	355.6	106	2692	25	12.7	5.8
UL1116	31.0	787.4	15.5	393.7	116	2946	25	13.3	6.0

*1/2" bands require #ULK910 for UL9010 tool
1/2" bands require #ULK200 for UL4000 tool