


# Stainless Steel Cable Ties

## Selection Guide

	Band-Lok	Tie-Lok	Ultra-Lok
<b>Cost</b>	Lowest		
<b>Stainless Steel Type</b>	201	201 304 316	201
<b>Uncoated</b>	Yes	Yes	Yes
<b>Coated</b>	No	No	No
<b>Releaseable</b>	No	No	No
<b>Tool Required</b>	Yes	Yes	Yes
<b>Tensioning/Cutoff Tool</b>	A950	Various	A940
<b>Self-Locking</b>	No	No	No

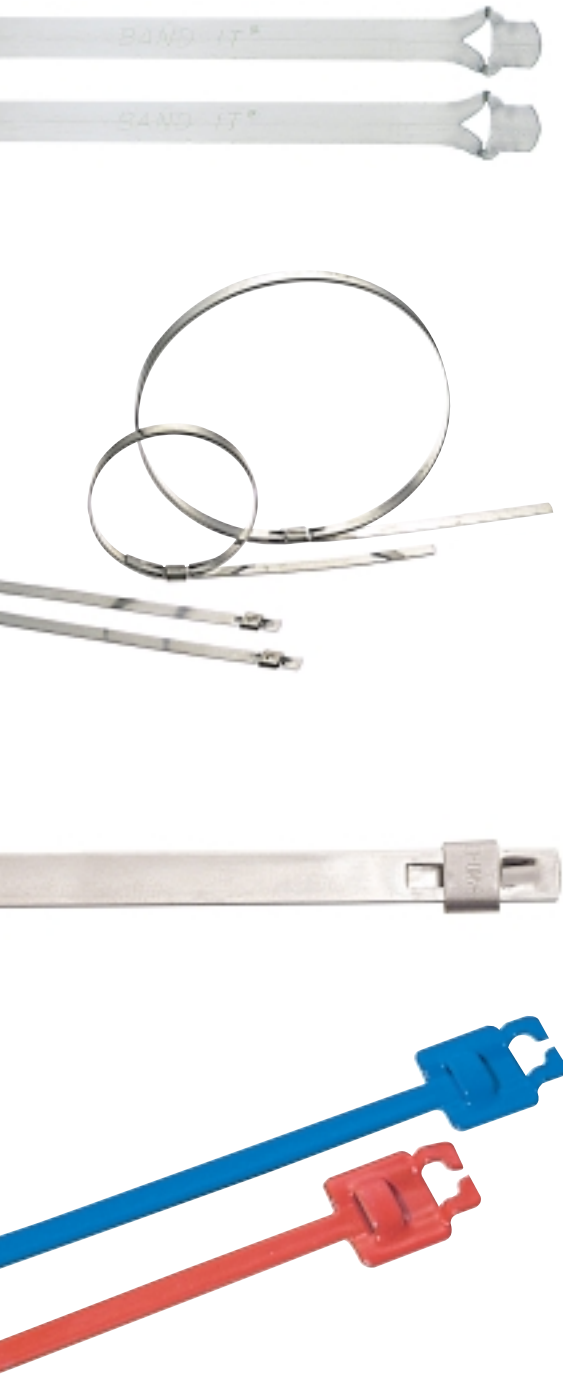

Tie	Type of Steel	Thickness				Width		Length	
		Uncoated In	Uncoated mm	Coated In	Coated mm	In	mm	In	mm
Band-Lok Ties	201 Stainless Steel*	.015	.38	-	-	5/16	7.9	10	254
		.015	.38	-	-	5/16	7.9	16	406
		.015	.38	-	-	5/16	7.9	19	482
		.015	.38	-	-	5/16	7.9	27	686
		.015	.38	-	-	5/16	7.9	34	864
Smooth I.D. Tie-Lok Ties	304 Stainless Steel	.015	.38	-	-	.25	6.35	10	254
		.015	.38	-	-	.25	6.35	16.5	419
		.015	.38	-	-	.25	6.35	22.5	572
		.015	.38	-	-	.25	6.35	29	737
		.015	.38	-	-	.25	6.35	35	889
		.020	.5	-	-	.38	9.53	7.2	184
		.020	.5	-	-	.38	9.53	10	254
	316 Stainless Steel	.020	.5	-	-	.38	9.53	16.5	406
		.020	.5	-	-	.38	9.53	22.5	572
		.020	.5	-	-	.38	9.53	29	737
		.015	.38	-	-	.25	6.35	10	254
		.015	.38	-	-	.25	6.35	16.5	419
		.015	.38	-	-	.25	6.35	22.5	572
		.015	.38	-	-	.25	6.35	29	737
Smooth I.D. Mini Tie-Lok Ties	304 Stainless Steel	.015	.38	-	-	.177	4.5	7	165
		.015	.38	-	-	.177	4.5	10	254
		.015	.38	-	-	.177	4.5	16	406
		.015	.38	-	-	.177	4.5	22.5	572
	316 Stainless Steel	.015	.38	-	-	.177	4.5	29.0	737
		.015	.38	-	-	.177	4.5	7	165
		.015	.38	-	-	.177	4.5	10	254
		.015	.38	-	-	.177	4.5	16	406
		.015	.38	-	-	.177	4.5	22.5	572
		.015	.38	-	-	.177	4.5	29.0	737
Smooth I.D. Ultra-Lok Ties	201 Stainless Steel	.015	.38	-	-	.25	6.35	8	203
		.015	.38	-	-	.25	6.35	10	254
		.015	.38	-	-	.25	6.35	12	305
		.015	.38	-	-	.25	6.35	14	356
		.015	.38	-	-	.25	6.35	16	406
		.015	.38	-	-	.25	6.35	19	483
		.015	.38	-	-	.25	6.35	24	610
		.015	.38	-	-	.25	6.35	29	737
		.015	.38	-	-	.25	6.35	35	889
BAND-IT Ties	200/300 Stainless Steel	.015	.38	.026	.66	1/4	6.35	6	152
		.015	.38	.026	.66	1/4	6.35	9	229
		.015	.38	.026	.66	1/4	6.35	12	305
		.015	.38	.026	.66	1/4	6.35	18	457
		.015	.38	.026	.66	1/4	6.35	24	610
		.015	.38	.026	.66	3/8	9.53	6	152
		.015	.38	.026	.66	3/8	9.53	9	229
		.015	.38	.026	.66	3/8	9.53	12	305
		.015	.38	.026	.66	3/8	9.53	18	457
		.015	.38	.026	.66	3/8	9.53	24	610
		.015	.38	.026	.66	3/8	9.53	30	762
		.015	.38	.026	.66	3/8	9.53	36	914
		.020	.5	.044	1.1	5/8	15.88	12	305
		.020	.5	.044	1.1	5/8	15.88	18	457
		.020	.5	.044	1.1	5/8	15.88	24	610
		.020	.5	.044	1.1	5/8	15.88	30	762
		.020	.5	.044	1.1	5/8	15.88	36	914