

# Polypropylene, Heavy-Duty


## FEATURES

- Extra thick walls, extra strength
- Safety Latches available on all couplers ranging in size from 1-1/4" to 3"
- Manufactured from glass-reinforced polypropylene for stability, strength and toughness
- Chemical resistant to most acids (Refer to chemical resistance tables for specific recommendation)
- EPDM gaskets furnished as standard. Buna-N, Viton and Neoprene also available.
- Interchangeable with other couplers and adapters – manufactured to MIL-spec
- All couplers feature stainless steel handles, rings & pins
- Normal conditions: from 10° F to 180° F

Price  
Lookup

New

New

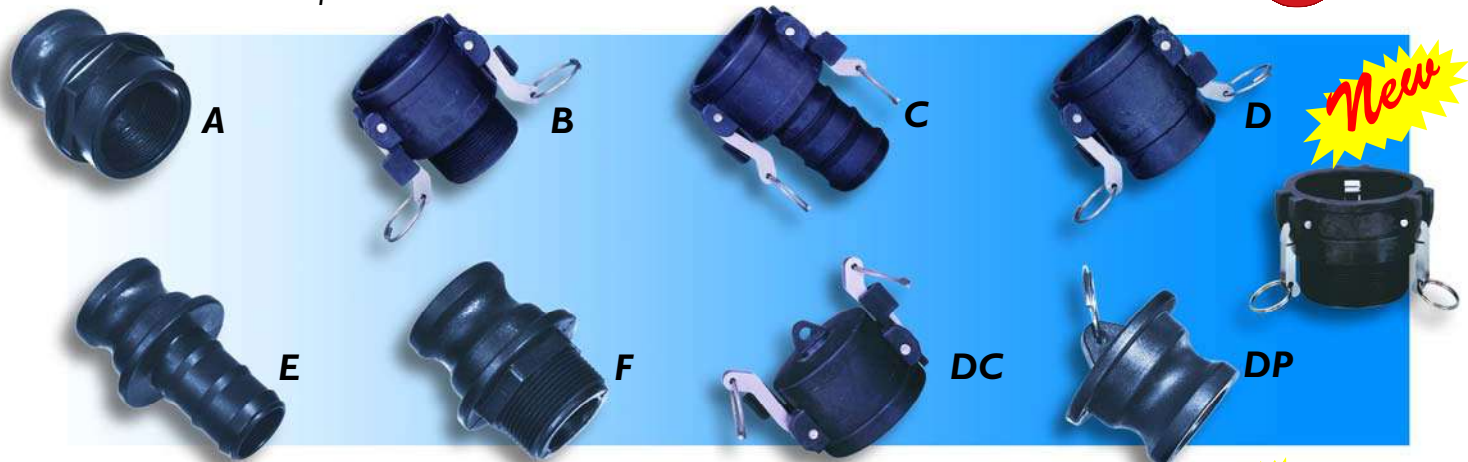

ITEM	DESCRIPTION	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	3"	4"
A	Male Adapter/Female Thread	050-A	075-A	100-A	125-A	150-A	200-A	300-A	400-A
	Std. Package — Qty.	6	6	6	6	12	12	12	—
	Std. Package — Wt.	1#	1#	1#	1#	4#	4#	1#	1.5 # ea
B	Female Coupler/Male Thread	050-B	075-B	100-B	125-B	150-B	200-B	300-B	400-B
	Std. Package — Qty.	6	6	6	6	12	12	6	3 handles
	Std. Package — Wt.	1#	1#	2#	3#	7#	7#	7#	2.1 # ea
C	Female Coupler/Hose Shank	050-C	075-C	100-C	125-C	150-C	200-C	300-C	400-C
	Std. Package — Qty.	6	6	6	6	12	12	6	3 handles
	Std. Package — Wt.	1#	1#	1#	3#	8#	8#	8#	2.4 # ea
D	Female Coupler/Female Thread	050-D	075-D	100-D	125-D	150-D	200-D	300-D	400-D
	Std. Package — Qty.	6	6	6	6	12	12	6	3 handles
	Std. Package — Wt.	1#	1#	1#	8#	8#	7#	8#	2.2 # ea
E	Male Adapter/Hose Shank	050-E	075-E	100-E	125-E	150-E	200-E	300-E	400-E
	Std. Package — Qty.	6	6	6	6	12	12	6	—
	Std. Package — Wt.	1#	1#	1#	1#	3#	4#	5#	1.9 # ea
F	Male Adapter/Male Thread	050-F	075-F	100-F	125-F	150-F	200-F	300-F	400-F
	Std. Package — Qty.	6	6	6	6	12	12	6	—
	Std. Package — Wt.	1#	1#	1#	1#	3#	4#	5#	1.7 # ea
DC	Female Coupler Cap	050-DC	075-DC	100-DC	125-DC	150-DC	200-DC	300-DC	400-DC
	Std. Package — Qty.	6	6	6	6	12	12	6	3 handles
	Std. Package — Wt.	1#	1#	2#	3#	6#	7#	6#	1.8 # ea
DP	Male Adapter Plug	050-DP	075-DP	100-DP	125-DP	150-DP	200-DP	300-DP	400-DP
	Std. Package — Qty.	6	6	6	6	12	12	6	—
	Std. Package — Wt.	1#	1#	1#	1#	3#	4#	4#	0.6 # ea

WARNING: Do not operate couplers under pressure or with liquid in the lines. To prevent accidental opening fully engage and secure handles prior to pressurizing.

Size  
1/2"-2"  
3"  
4"

Operating Pressure  
125 psi max @ 70° F  
100 psi max @ 70° F  
75 psi max @ 70° F

Couplers include  
3 cam handles

