


# BLACK HEAVY DUTY BELTING

## 3 Ply Standard Black Heavy Duty - High Abrasion Resistant

These belts feature the same compounds and fabric as the 2 ply belts above, but offer an additional ply to provide extra strength and impact resistance. No. 80b is used primarily on high-tension conveyors and elevators with long centers or in abusive situations.

- 77** 3 Ply 330 3/16" x 1/16"
- 77c** 3 Ply 330 1/16" x Bare
- 77d** 3 Ply 330 3/16" x Bare
- 78** 3 Ply 330 1/4" x 1/16"
- 80b** 3 Ply 660 1/4" x 1/16"

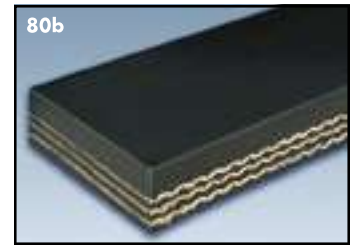

## 4 Ply Standard Black Heavy Duty - High Abrasion Resistant

Same fabric and compounds as 2 and 3 ply heavy duty belts, shown on page 11, but 4 ply construction offers high strength and impact resistance. Used often on high tension conveyors with long centers, or in applications involving abusive conditions.

- 80** 4 Ply 440 1/4" x 1/16"
- 80a** 4 Ply 440 3/8" x 3/32"




## 2 and 3 Ply Moderate Oil Resistant

Combines excellent abrasion resistance and long flex life with moderate oil resisting properties. Ideal belt for conveying oily grains and wood chips.

\* 220# is also available for No. 53.


- 53** 2 Ply 160\* Black 1/8" x Bare MOR
- 74** 2 Ply 220 1/8" x 1/16" MOR-SC
- 75a** 3 Ply 225 1/8" x Bare MOR
- 75b** 2 Ply 220 3/16" x 1/16" MOR-SC
- 77a** 3 Ply 330 3/16" x 1/16" MOR-SC
- 77b** 3 Ply 330 3/32" x Bare MOR

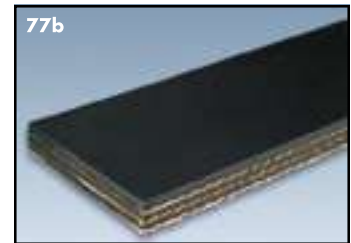

## 2 Ply MSHA-SBR

Designed for mining applications where fire resistance is required. Meets the requirements of power plants where oil resistance is not required. Carries the MSHA designation for flame resistance.


- 74c** 2 Ply 220 5/32" x 3/32" MSHA-SBR

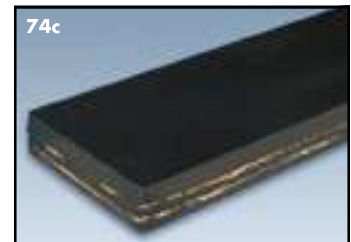

## 2 and 3 Ply MSHA Oil Resistant-Static Conductive

Specially compounded for the oily effects of grain, this belt is also static conductive. Carries the MSHA designation #28 for flame resistance. Designed for grain conveyors and elevators where static charges must be held to a minimum. SOR compound, resistant to vegetable oil sprays, is available in Nos. 74b, 76 and 80c. \* In stock but not shown in Beltservice's full line sample catalog.

- 74a** 2 Ply 220 1/8" x 1/16" MSHA/SC/MOR
- 74b** 2 Ply 220 1/16" x 1/16" MSHA/SC/SOR\*
- 76** 3 Ply 330 3/64" x 3/64" MSHA/SC/SOR
- 80c** 3 Ply 600 1/16" x 1/16" MSHA/SC/SOR

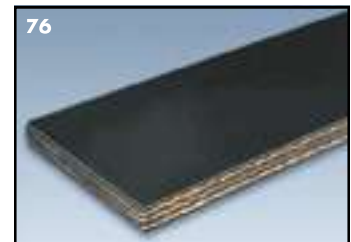

## Super Oil Resistant - (Hot Asphalt)

"Super Oil Resistant" is specially compounded for applications requiring moderate to very high oil resistance such as hot asphalt, foundries, oily grains, machine oils, and oil treated coal. These belts have the same high-quality fabric characteristics as "Standard."


- 81** 2 Ply 220 3/16" x 1/16" Hot Asphalt SOR
- 81a** 3 Ply 330 3/16" x 1/16" Hot Asphalt SOR



## High Heat Resistant - 400°

"High Heat Resistant" is a premium grade belt featuring compounds specially formulated to withstand temperatures to 400°F. It offers maximum resistance to the deteriorating effects of severe heat encountered in many applications such as in cement plants and foundries; also tough and abrasion resistant.

- 82** 2 Ply 220 3/16" x 1/16" Heat Resistant 400°F
- 83** 3 Ply 330 1/4" x 1/16" Heat Resistant 400°F
- 83a** 3 Ply 225 1/8" x Bare Heat Resistant 400°F
- 83b** 4 Ply 440 1/4" x 1/16" Heat Resistant 400°F

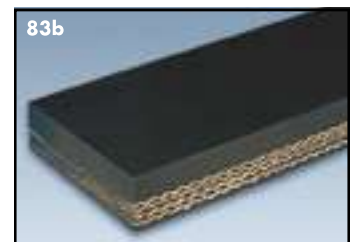

**BELT SAMPLES ARE AVAILABLE! CALL FOR DETAILS.**