


Positionable Male Branch Tee N6803


INCH OD Tubes x SAE/MS Straight Threads



| Part No. | T Tube OD | S SAE/MS Male | A | Ax | B | C | D | E min. | F A/F | Fx A/F | G A/F | H | Hx | Hy | U | O Ring Part No. |
|--------------------|--------------|------------------|-------|------|------|------|------|-----------|----------|-----------|----------|-------|------|------|------|--------------------|
| N6803-04-04-04-NWO | 1/4 | 7/16-20 | 57.0 | 28.5 | 9.9 | 17.8 | 15.3 | 4.8 | 14 | 14 | 14 | 42.0 | 21.0 | 28.5 | 16.5 | 4 OPU |
| N6803-06-06-06-NWO | 3/8 | 9/16-18 | 64.0 | 32.0 | 11.2 | 19.3 | 16.8 | 7.1 | 16 | 17 | 17 | 49.2 | 24.6 | 32.3 | 20.0 | 6 OPU |
| N6803-08-08-08-NWO | 1/2 | 3/4-16 | 75.2 | 37.6 | 12.7 | 21.8 | 22.9 | 10.4 | 22 | 22 | 22 | 54.8 | 27.4 | 37.8 | 25.6 | 8 OPU |
| N6803-12-12-12-NWO | 3/4 | 1-1/16-12 | 82.8 | 41.4 | 16.8 | 21.8 | 24 | 15.8 | 27 | 32 | 28.5 | 62.4 | 31.2 | 48.8 | 36.6 | 12 OPU |
| N6803-16-16-16-NWO | 1 | 1-5/16-12 | 101.1 | 50.5 | 16.8 | 26.4 | 31.2 | 22.3 | 35 | 35 | 38 | 76.8 | 38.4 | 53.6 | 44.0 | 16 OPU |
| N6803-20-20-20-NWO | 1-1/4 | 1-5/8-12 | 135.6 | 68 | 16.8 | 38.9 | 41.2 | 27.6 | 46 | 50 | 50 | 91.4 | 46 | 58 | 55 | 20 OPU |
| N6803-24-24-24-NWO | 1-1/2 | 1-7/8-12 | 156.0 | 78.0 | 16.8 | 45.2 | 50.0 | 34.0 | 50 | 55 | 60 | 101.6 | 51 | 60 | 63 | 24 OPU |

Positionable Male Run Tee N6804

INCH OD Tubes x SAE/MS Straight Threads

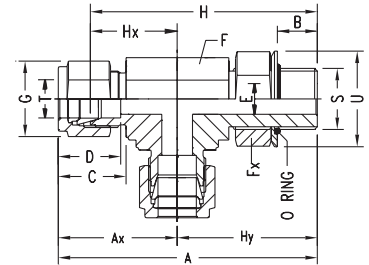

| Part No. | T Tube OD | S SAE/MS Male | A | Ax | B | C | D | E min. | F A/F | Fx A/F | G A/F | H | Hx | Hy | U | O Ring Part No. |
|--------------------|--------------|------------------|-------|------|------|------|------|-----------|----------|-----------|----------|-------|------|------|------|--------------------|
| N6804-04-04-04-NWO | 1/4 | 7/16-20 | 57.0 | 28.5 | 9.9 | 17.9 | 15.3 | 4.8 | 14 | 14 | 14 | 49.5 | 21.0 | 28.5 | 16.5 | 4 OPU |
| N6804-06-06-06-NWO | 3/8 | 9/16-18 | 64.3 | 32.0 | 11.2 | 19.3 | 16.8 | 7.1 | 16 | 17 | 17 | 56.9 | 24.6 | 32.3 | 20.0 | 6 OPU |
| N6804-08-08-08-NWO | 1/2 | 3/4-16 | 75.4 | 37.6 | 12.7 | 21.8 | 22.9 | 10.4 | 22 | 22 | 22 | 65.2 | 27.4 | 37.8 | 25.6 | 8 OPU |
| N6804-12-12-12-NWO | 3/4 | 1-1/16-12 | 90.2 | 41.4 | 16.8 | 21.8 | 24.4 | 15.8 | 27 | 32 | 28.5 | 80.0 | 31.2 | 48.8 | 36.6 | 12 OPU |
| N6804-16-16-16-NWO | 1 | 1-5/16-12 | 104.1 | 50.5 | 16.8 | 26.4 | 31.2 | 22.3 | 35 | 35 | 38 | 92.0 | 38.4 | 53.6 | 44.0 | 16 OPU |
| N6804-20-20-20-NWO | 1-1/4 | 1-5/8-12 | 126.0 | 67.8 | 16.8 | 38.9 | 41.2 | 27.6 | 46 | 50 | 50 | 103.9 | 45.7 | 58.2 | 54.9 | 20 OPU |
| N6804-24-24-24-NWO | 1-1/2 | 1-7/8-12 | 138.4 | 78.0 | 16.8 | 45.2 | 50.0 | 34.0 | 50 | 55 | 60 | 111.2 | 50.8 | 60.4 | 62.5 | 24 OPU |