



Air Fittings and Accessories

Surelock Quick Acting Couplings

The Surelock coupling is a multi-purpose coupling for water and air, commonly used in construction and mining. This coupling excels where ease, economy, safety and speed are paramount. They are stocked in sizes from 3/8" through 2". The pressure activated gasket allows easy coupling (less than 15 lbs. of force is required to connect the coupling) and gaskets seal upon introduction of line pressure. **Safety pins are required as a safety precaution.**


**SAFETY
ALERT**

Specifications:

- Body: SG iron AS1831 400-250-12
- Bellow seal: natural rubber (patent pending), other seal material available upon request
- Working pressure: **500 PSI**


D
Air Fittings

Hose Ends

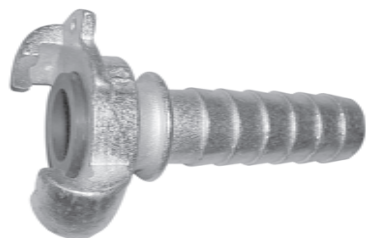

Head	Size	Part #	Price/E	Pkg Qty
small	3/8"	SL038H	\$8.80	50
	1/2"	SL050H	9.20	50
	3/4"	SL075H	9.80	50
	1"	SL100H	10.75	50
medium	1-1/2"	SL150H	29.60	15
	2"	SL200H	35.30	10

Male NPT Ends



Head	Size	Part #	Price/E	Pkg Qty
small	3/8"	SL038M	\$11.30	50
	1/2"	SL050M	11.10	50
	3/4"	SL075M	10.60	50
	1"	SL100M	11.50	50
medium	1-1/2"	SL150M	28.80	15
	2"	SL200M	31.90	15

Female NPT Ends



Head	Size	Part #	Price/E	Pkg Qty
small	3/8"	SL038F	\$11.30	50
	1/2"	SL050F	11.00	50
	3/4"	SL075F	8.90	50
	1"	SL100F	10.50	50
medium	1-1/2"	SL150F	29.40	15
	2"	SL200F	30.00	15


Surelock Quick Acting Couplings with Ferrules

Universal design provides quick, easy and effective coupling of air hose. Exclusive interlocking ferrule can be crimped or swaged to achieve maximum coupling sealing and retention with a low profile streamline appearance. See page 545 for crimp recommendations.

Dixon recommends that all hose assemblies be tested in accordance with RMA testing procedures.

- Rated to **500 PSI** working pressure.
- For air and water service only.

**SAFETY
ALERT**



Head	Size	Hose O.D.		Part #	Price/E
		From:	To:		
small	1/2"	54/64	1-2/64	SL050CR	\$15.20
	3/4"	1-4/64	1-22/64	SL075CR	15.80
	1"	1-30/64	1-46/64	SL100CR	16.75
medium	1-1/2"	2-1/64	2-8/64	SL150CR	69.60
	2"	2-41/64	2-48/64	SL200CR	75.30