


## Wilkerson Filter / Regulators

Over-under units are space savers and provide for installation in tight areas. One common inlet/outlet for both filter and regulator saves on piping costs.

### Compact Transparent Bowl with Guard

Automatic Drain

Manual Drain

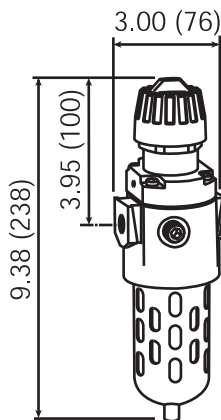

Size	Part #	SCFM	Price/E	Size	Part #	SCFM	Price/E
1/4"	<b>CB6-02AG</b>	80	<b>\$236.55</b>	1/4"	<b>CB6-02MG</b>	80	<b>\$185.95</b>
3/8"	<b>CB6-03AG</b>	80	<b>236.55</b>	3/8"	<b>CB6-03MG</b>	80	<b>185.95</b>
1/2"	<b>CB6-04AG</b>	80	<b>236.55</b>	1/2"	<b>CB6-04MG</b>	80	<b>185.95</b>

### Compact Metal Bowl with Sight Glass

Automatic Drain

Manual Drain

Size	Part #	SCFM	Price/E	Size	Part #	SCFM	Price/E
1/4"	<b>CB6-02AGMB</b>	80	<b>\$252.90</b>	1/4"	<b>CB6-02MGMB</b>	80	<b>\$202.25</b>
3/8"	<b>CB6-03AGMB</b>	80	<b>252.90</b>	3/8"	<b>CB6-03MGMB</b>	80	<b>202.25</b>
1/2"	<b>CB6-04AGMB</b>	80	<b>252.90</b>	1/2"	<b>CB6-04MGMB</b>	80	<b>202.25</b>




- Standard pressure range, **0-125 PSIG (0-8.5 bar)**
- 5 micron rated reusable element
- 5 oz. bowl
- Self-relieving standard
- Balanced valve design
- Diaphragm operated
- Quick-disconnect bowl guard with integral plastic bowl and safety latch standard.
- Two 1/4" gauge ports standard
- Maximum operating conditions:  
*Transparent bowls:*  
**150 PSIG (10 bar) and 125°F (52°C)**  
*Metal bowls:*  
**200 PSIG (14 bar) and 150°F (65.5°C)**

Models supplied with a GC230 gauge.

### Compact Transparent Bowl with Guard

Automatic Drain

Manual Drain

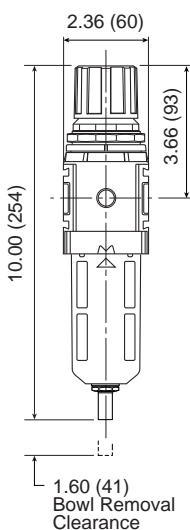

Size	Part #	SCFM	Price/E	Size	Part #	SCFM	Price/E
1/4"	<b>B18-02AG</b>	100	<b>\$217.20</b>	1/4"	<b>B18-02MG</b>	100	<b>\$166.60</b>
3/8"	<b>B18-03AG</b>	105	<b>217.20</b>	3/8"	<b>B18-03MG</b>	105	<b>166.60</b>
1/2"	<b>B18-04AG</b>	125	<b>217.20</b>	1/2"	<b>B18-04MG</b>	125	<b>166.60</b>

### Compact Metal Bowl with Sight Glass

Automatic Drain

Manual Drain

Size	Part #	SCFM	Price/E	Size	Part #	SCFM	Price/E
1/4"	<b>B18-02AGMB</b>	100	<b>\$231.15</b>	1/4"	<b>B18-02MGMB</b>	100	<b>\$180.50</b>
3/8"	<b>B18-03AGMB</b>	105	<b>231.15</b>	3/8"	<b>B18-03MGMB</b>	105	<b>180.50</b>
1/2"	<b>B18-04AGMB</b>	125	<b>231.15</b>	1/2"	<b>B18-04MGMB</b>	125	<b>180.50</b>



- High flow capacity
- **0-125 PSIG (0-8.5 bar)**
- 5 micron filter
- 4 oz. bowl
- Balanced valve design
- Spring-loaded diaphragm
- Maximum operating conditions:  
*Transparent bowls:*  
**150 PSIG (10 bar) and 125°F (52°C)**  
*Metal bowls:*  
**250 PSIG (17 bar) and 175°F (79°C)**