

Wilkerson Lubricators

D
Air
Fittings




**Jumbo Transparent 26 oz. Bowl
with Guard**

Size	Part #	SCFM	Price/E
3/4"	L30-06A	170	\$238.90
1"	L30-08A	340	238.90

**Jumbo Metal 26 oz. Bowl
with Sight Glass**

Size	Part #	SCFM	Price/E
3/4"	L30-06AMB	170	\$288.55
1"	L30-08AMB	340	288.55

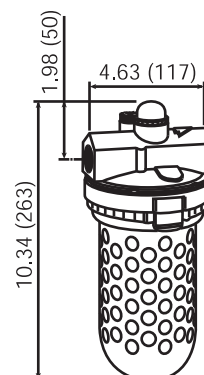


**Heavy Duty Transparent 26 oz. Bowl
with Guard**

Size	Part #	SCFM	Price/E
1-1/4"	L40-0AA	850	\$541.20
1-1/2"	L40-0BA	850	541.20
2"	L50-0CA	1100	700.20

**Heavy Duty Metal 26 oz. Bowl
with Sight Glass**

Size	Part #	SCFM	Price/E
1-1/4"	L40-0AAMB	850	\$590.80
1-1/2"	L40-0BAMB	850	590.80
2"	L50-0CAMB	1100	749.85

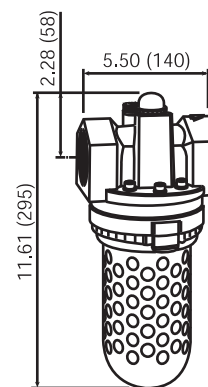

L40 model is illustrated. Contact the factory for L50 dimensions.

- Full view sight dome
- Quick-disconnect clamp ring for easy bowl removal
- Manual bottom drain provided as standard (Metal bowl with sight glass only)

- Adjustable oil feed
- Maximum operating conditions:
Transparent bowls: 150 PSIG (10 bar) and 125°F (52°C)
Metal bowls: 200 PSIG (14 bar) and 150°F (65.5°C)

Flow Guide®

The elastomer disc-shaped device is located in the throat of all Wilkerson lubricators and automatically maintains a constant ratio of oil flow to airflow regardless of changing rates of airflow. This allows one lubricator to serve several pneumatic components operating together or intermittently.

Type of oil to use:

For all Wilkerson lubricators, use any petroleum-base, non-detergent light weight oil (SAE 10/150SSU) which will readily break up into a mist, i.e., Mobil DTE light or comparable oil. Do not use any synthetic oil or oils containing additives or solvents. See page 119 for air tool lubricants.