


Watts Filters

Standard Zinc Bowl with Sight Glass



- 16 oz. bowl
- 40 micron polypropylene element
- Zinc body

Automatic Drain				Manual Drain			
Size	Part #	SCFM	Price/E	Size	Part #	SCFM	Price/E
1-1/2"	F602 - 12WJR	380	\$407.70	1-1/2"	F602 - 12WJ	380	\$351.80


- Operating conditions:
Temperature range:
40°F (4.4°C) to 120°F (48.9°C)
Pressure range:
175 PSIG (12 bar) maximum

- Operating conditions:
Temperature range:
40°F (4.4°C) to 150°F (65.6°C)
Pressure range:
250 PSIG (17 bar) maximum



D
Air
Fittings

Standard Zinc Bowl with Sight Glass



- 26 oz. bowl
- 40 micron bronze element
- Aluminum body


Automatic Drain				Manual Drain			
Size	Part #	SCFM	Price/E	Size	Part #	SCFM	Price/E
2"	F602 - 16WJR	1125	\$1166.00	2"	F602 - 16WJ	1125	\$1110.10

- Operating conditions:
Temperature range:
40°F (4.4°C) to 120°F (48.9°C)
Pressure range:
175 PSIG (12 bar) maximum

- Operating conditions:
Temperature range:
40°F (4.4°C) to 150°F (65.6°C)
Pressure range:
250 PSIG (17 bar) maximum



Filter / Regulator Zinc Bowl with Sight Glass

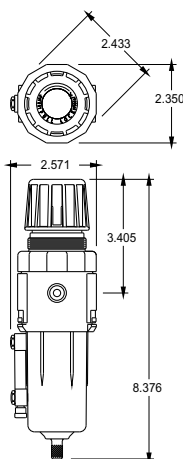

Automatic Drain				Manual Drain			
Size	Part #	SCFM	Price/E	Size	Part #	SCFM	Price/E
1/4"	B11 - 02WJCR	60	\$245.30	1/4"	B11 - 02WJC	60	\$189.40
3/8"	B11 - 03WJCR	70	245.30	3/8"	B11 - 03WJC	70	189.40
1/2"	B11 - 04WJCR	80	245.30	1/2"	B11 - 04WJC	80	189.40

- Reduced pressure range:
2 - 125 PSIG (.15 - 8.5 bar)
- Temperature range:
40°F (4.4°C) to 120°F (48.9°C)
- **4 oz. bowl**
- Tamper resistant, snap lock, removable knobs

- 40 micron filter
- Diaphragm operated
- Relieving
- Zinc body
- Spring adjustment mechanism
- Glass-filled acetal plastic spring cage
- Standard gauge is GC230 (not supplied)

