



Washdown Nozzles, Pressure Gun and Accessories

## Spray Lances and Extensions for Pressure Gun



- For use with AL9 spray gun **only**
- Operating pressure: **4000 PSI** maximum
- Temperatures to **300°F**

Part #	Description	Length	Price/E
<b>AL248</b>	zinc, 22 mm x 14 mm male inlet x 1/4" male outlet	24"	<b>\$21.20</b>

### Dual Lance




- For use with HPSG, HPSGC and HPSGHD
- For soap and water
- Operating pressure: **4000 PSI** maximum
- Temperatures to **300°F**

- **GPM: 10.5**
- Requires 1 high pressure nozzle and 1 soap nozzle (pg. 242)
- Allows quick adjustment from high to low pressure with a twist of the handle; low pressure setting allows for use of soap

F  
Brass  
Fittings

Part #	Description	Length	Price/E
<b>AL344</b>	stainless steel, 1/4" male inlet, 2 each 1/4" female outlets	40"	<b>\$150.50</b>

### Molded Grip Extensions

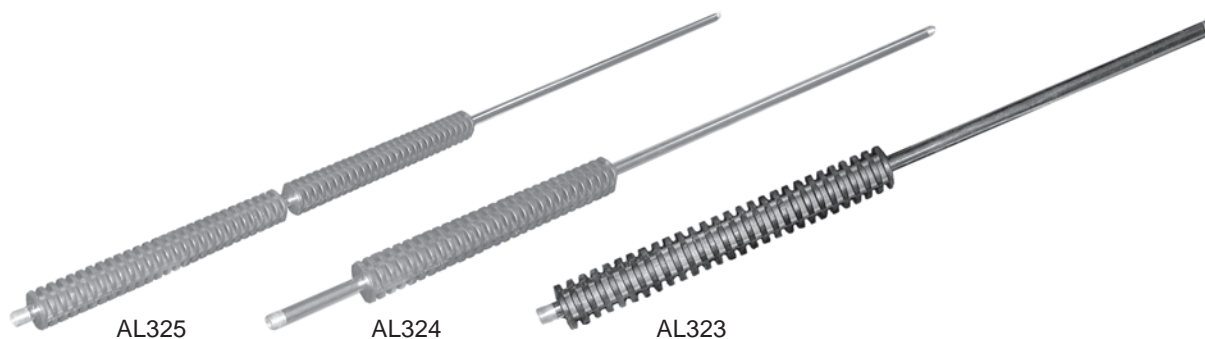

- For use with HPSG, HPSGC and HPSGHD
- Operating pressure: **5000 PSI** maximum
- Temperatures to **300°F**

Part #	Description	Length	Price/E
<b>AL323XX</b>	zinc, 1/4" male inlet x 1/4" male outlet	24"	<b>\$19.75</b>
<b>AL324XX</b>	zinc, 1/4" male inlet x 1/4" male outlet, 4" space from the end	36"	<b>20.50</b>
<b>AL325XX</b>	zinc, 1/4" male inlet x 1/4" male outlet, 2 grips	48"	<b>34.00</b>

### Vented Grip Lance



- For use with HPSG, HPSGC and HPSGHD
- For hot water
- Operating pressure: **5000 PSI** maximum
- Temperatures to **300°F**

Part #	Description	Length	Price/E
<b>AL361</b>	zinc, 1/4" male inlet x 1/4" female outlet	36"	<b>\$42.50</b>