



## Brass Push-On Fittings

### Rigid Tube Hose Barbs



Hose I.D.	Tube O.D.	Part #	Price/E	Pkg Qty
1/4"	3/16"	<b>294-0403</b>	<b>\$2.85</b>	100
1/4"	1/4"	<b>294-0404</b>	<b>2.00</b>	100
1/4"	5/16"	<b>294-0405</b>	<b>2.50</b>	100
3/8"	3/8"	<b>294-0606</b>	<b>2.75</b>	50
1/2"	1/2"	<b>294-0808</b>	<b>3.95</b>	50
5/8"	5/8"	<b>294-1010</b>	<b>7.30</b>	25
3/4"	3/4"	<b>294-1212</b>	<b>8.45</b>	25

### Hose Menders



Hose I.D.	Part #	Price/E	Pkg Qty
1/4"	<b>BPM2</b>	<b>\$2.45</b>	100
5/16"	<b>BPM25</b>	<b>2.65</b>	100
3/8"	<b>BPM3</b>	<b>2.70</b>	50
1/2"	<b>BPM4</b>	<b>4.20</b>	50
5/8"	<b>BPM5</b>	<b>5.55</b>	25
3/4"	<b>BPM6</b>	<b>6.75</b>	25

### 90° Hose to Male NPTF Elbows




Hose I.D.	NPTF Thread	Part #	Price/E	Pkg Qty
1/4"	1/8"-27	<b>273-0402</b>	<b>\$3.80</b>	100
1/4"	1/4"-18	<b>273-0404</b>	<b>4.65</b>	50
3/8"	1/4"-18	<b>273-0604</b>	<b>5.25</b>	50
3/8"	3/8"-18	<b>273-0606</b>	<b>6.40</b>	25
1/2"	3/8"-18	<b>273-0806</b>	<b>8.15</b>	25
1/2"	1/2"-14	<b>273-0808</b>	<b>10.10</b>	25
3/4"	3/4"-14	<b>273-1212</b>	<b>19.00</b>	25

Optional Pkg./Box Quantity Shown

F  
Brass  
Fittings

## Tools for Push-On Fittings

- Cuts push-on style hose and inserts the fitting
- Built-in cutter slices through 1/4" - 3/4" ID reinforced push-on hose without fraying
- Clamp hose into tool's vice and apply light pressure on handle to drive in the fitting
- Tool has four 7/16" diameter mounting hose for bench mounting
- Overall size is 13-1/2" long x 2-3/8" wide x 7" height

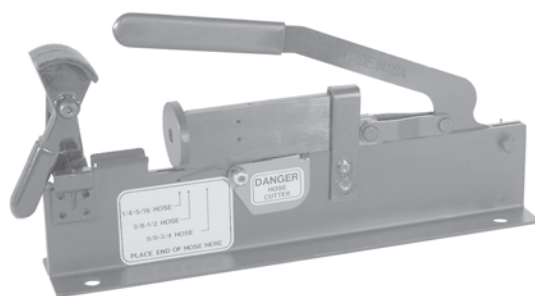

Size	Part #	Price/E
all	<b>270AT</b>	<b>\$686.70</b>

#### Assembly Instructions:

1. Trim hose end with smooth square cut
2. Lubricate either push-on fitting, hose or both.
3. Insert push-on fitting into hose until first barb is in hose.
4. Place end of fitting against a flat object (bench, wall, etc.) and grip the hose one inch from end. Push with a steady force until end of hose is covered by yellow plastic cap.

#### Disassembly Instructions:

1. Leaving push-on fitting in place, make a 1" cut in the hose along the barbed end of the fitting. Note: Be careful not to nick barbs when cutting the hose.
2. With firm grip on hose, give a sharp downward pull to release the fitting from the hose.

SAFETY  
ALERT

**Caution:** Push-on fittings will properly grip push-on hose only when pushed all the way in, with the cut end of the hose completely concealed by the plastic cap.