



Valves

Full Flow Aluminum Ball Valves

- High flow rate; low pressure drop
- Wetted parts are aluminum and stainless steel
- Seals are FPM (Viton®) and PTFE Teflon®)
- Spindle can be disassembled even when ball valve is installed
- Working pressure: **150 PSI**
- Available in 2", 3" and 4" in standard flow and two-way flow
- Female NPT outlets are standard
- Optional flanges are available

One-Way Ball Valves / Female NPT ends



- Two ports - one inlet and one outlet

Size	Part #	Price / Each
2"	1WAYBV200	\$700.00
3"	1WAYBV300	930.00
4"	1WAYBV400	1350.00

Two-Way Ball Valves / Female NPT ends




- Three ports - one inlet and two outlets, valve directs the flow from the inlet to either of the two outlets
- Commonly used for switching compartments or tanks

Size	Part #	Price / Each
2"	2WAYBV200	\$975.00
3"	2WAYBV300	1250.00
4"	2WAYBV400	2725.00

Custom Design Ball Valves Options

Body Only

- The one-way ball valve is available in body only, featuring two flanged ports.
- The two-way ball valve is available in body only, featuring three flanged ports.
- Select socket weld, butt weld or female threaded ends.
- Examples: socket weld x female NPT on one-way valve or butt weld x female NPT x butt weld on two-way valve

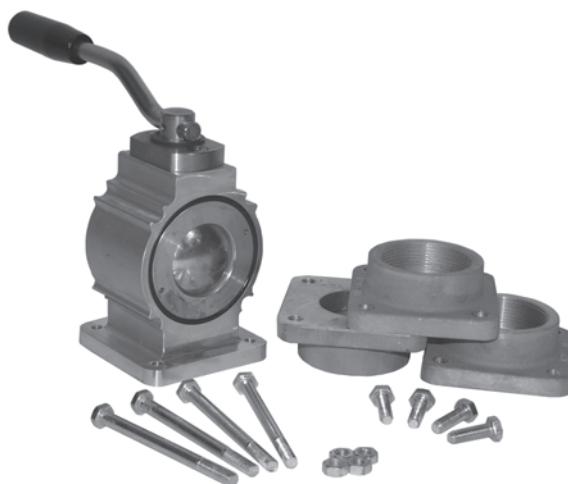

M

Valves