




## Valves

### Domestic Brass Ball Valves

- For control of air, water, oil and gas in hose or pipe lines. For other services, please contact the factory.
- Rated to **600 PSI** WOG; **150 PSI** saturated steam
- Brass valve bodies, balls and stems
- Blow-out proof stems

Size	Port	Part #	Price / E
1/4"	full	<b>BBV25</b>	<b>\$25.55</b>
3/8"	full	<b>BBV38</b>	<b>25.55</b>
1/2"	full	<b>BBV50</b>	<b>25.55</b>
3/4"	standard	<b>BBV75</b>	<b>42.15</b>
1"	standard	<b>BBV100</b>	<b>53.15</b>
1-1/4"	standard	<b>BBV125</b>	<b>89.15</b>
1-1/2"	standard	<b>BBV150</b>	<b>113.85</b>
2"	standard	<b>BBV200</b>	<b>142.65</b>

- Glass-filled reinforced Teflon® seats and stuffing box ring; stem seals and washers.
- Plated steel handles and nuts with vinyl sleeves, both styles repairable
- Meets WW-V 35C, Type II Composition
- Ball valve handle replacements available, consult factory for pricing.

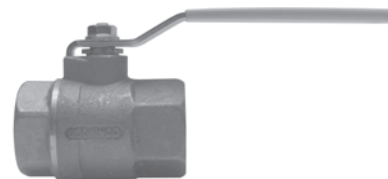


Female NPT x Female NPT

### Locking Handle Brass Ball Valves

- For control of air, water, oil and gas in hose or pipe lines. For other services, please contact the factory.
- Rated to **600 PSI** WOG; **150 PSI** steam

Size	Port	Part #	Price / E
1/4"	full	<b>BBLV25</b>	<b>\$33.50</b>
3/8"	full	<b>BBLV38</b>	<b>33.50</b>
1/2"	full	<b>BBLV50</b>	<b>33.50</b>
3/4"	standard	<b>BBLV75</b>	<b>50.05</b>
1"	standard	<b>BBLV100</b>	<b>61.00</b>
1-1/4"	standard	<b>BBLV125</b>	<b>96.95</b>
1-1/2"	standard	<b>BBLV150</b>	<b>121.65</b>
2"	standard	<b>BBLV200</b>	<b>150.40</b>

- Blow-out proof RPTFE stem
- Chrome-plated brass ball
- Stainless steel sliding lock mechanism secures handle in open or closed position; can be padlocked opened or closed.

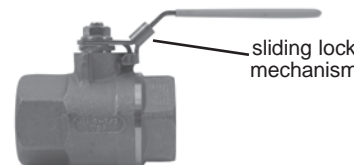

Female NPT x Female NPT

### Global Brass Ball Valves

- For control of air, water, oil and gas in hose or pipe lines.
- Rated to **600 PSI** WOG
- Body: forged brass, UNS#C37700
- Adjustable stem packing nut

- Silicone free
- Temperature range to **300°F (150°C)**
- Underwriters approved
- CSA approved (Canadian Standards Association)

Size	Port	Part #	Price / E
1/2"	full	<b>FBVG50</b>	<b>\$15.70</b>
3/4"	full	<b>FBVG75</b>	<b>25.20</b>
1"	full	<b>FBVG100</b>	<b>38.25</b>
1 1/4"	full	<b>FBVG125</b>	<b>60.00</b>
1 1/2"	full	<b>FBVG150</b>	<b>84.00</b>
2"	full	<b>FBVG200</b>	<b>120.00</b>




Female NPT x Female NPT

### Solder End Brass Ball Valves

- This valve is designed for the best protection against potential gas leakage under extreme duty, or low pressure applications.
- Rated to **600 PSI** WOG - 150 WSP
- Temperature range to **366°F**

- Underwriters approved
- Brass body
- Blow-out proof stem
- Chrome-plated brass ball
- PTFE seats, seals, and thrust washer
- Adjustable stem packing nut

Size	Port	Part #	Price / E
1/2"	full	<b>FBV50SE</b>	<b>\$24.25</b>
3/4"	full	<b>FBV75SE</b>	<b>33.05</b>
1"	full	<b>FBV100SE</b>	<b>48.75</b>
1 1/4"	full	<b>FBV125SE</b>	<b>87.90</b>
1 1/2"	full	<b>FBV150SE</b>	<b>128.85</b>
2"	full	<b>FBV200SE</b>	<b>180.40</b>

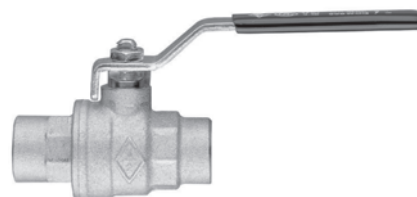

See page 550 for valve diagrams

M  
Valves