


Stainless Steel Ball Valves

- For use in water, oil and gas
- 1/4" - 2" rated to **1000 PSI** WOG (CWP); 2 1/2" - 3" rated to **800 PSI** WOG (CWP); **100 PSI** saturated steam
- 316 stainless steel body, ball and stem
- Teflon® seat, joint gasket and thrust washer
- Plastic cover on handle
- Blow-out proof stem design
- Temperature range **-60°F** to **450°F**


Size	Port	Part #	Price / E
1/4"	full	SSBV25	\$50.00
3/8"	full	SSBV38	55.00
1/2"	full	SSBV50	64.00
3/4"	full	SSBV75	81.10
1"	full	SSBV100	116.25
1-1/4"	full	SSBV125	152.50
1-1/2"	full	SSBV150	205.25
2"	full	SSBV200	305.00
2-1/2"	full	SSBV250	628.10
3"	full	SSBV300	910.15

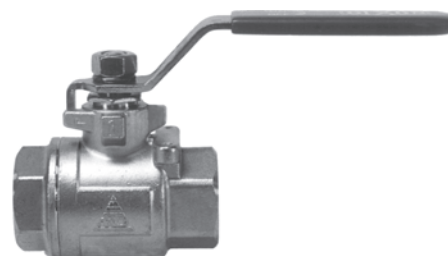

Full Port
Female NPT x Female NPT

- For use in water, oil and gas
- Rated to **1000 PSI** WOG; **100 PSI** saturated steam
- 316 stainless steel body, ball and stem
- Teflon® seat, joint gasket and thrust washer
- Plastic cover on handle
- Blow-out proof stem design
- Temperature range **-60°F** to **450°F**
- Lockable


Size	Port	Part #	Price / E
1/4"	full	SSLBV25	\$56.90
3/8"	full	SSLBV38	56.90
1/2"	full	SSLBV50	66.90
3/4"	full	SSLBV75	82.70
1"	full	SSLBV100	126.10
1-1/4"	full	SSLBV125	155.75
1-1/2"	full	SSLBV150	220.50
2"	full	SSLBV200	303.15

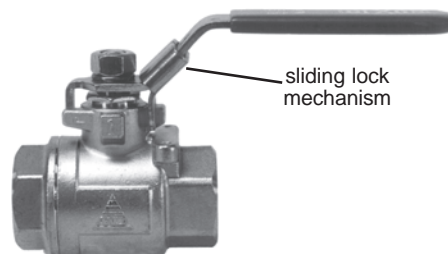

Full Port with Locking Handle
Female NPT x Female NPT

- For use in water, oil and gas
- Rated to **800 PSI** WOG; **100 PSI** saturated steam
- 316 stainless steel body, ball and stem
- Teflon® seat, joint gasket and thrust washer
- Plastic cover on handle
- Blow-out proof stem design
- Temperature range **-60°F** to **450°F**
- Lockable

Size	Port	Part #	Price / E
1/4"	reduced	SSLBV25SP	\$39.75
3/8"	reduced	SSLBV38SP	42.45
1/2"	reduced	SSLBV50SP	48.40
3/4"	reduced	SSLBV75SP	61.00
1"	reduced	SSLBV100SP	92.75
1-1/4"	reduced	SSLBV125SP	110.00
1-1/2"	reduced	SSLBV150SP	139.15
2"	reduced	SSLBV200SP	186.90

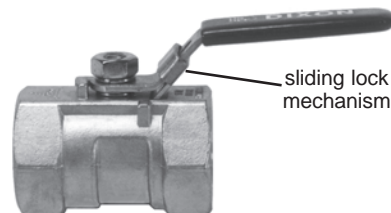

Reduced Port with Locking Handle
Female NPT x Female NPT

M
Valves