



## Valves

### Stainless Steel Ball Valves

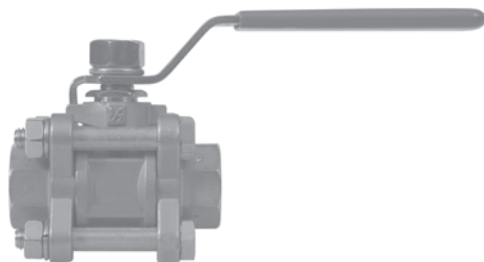


Reduced Port  
Female NPT x Female NPT

- For use in water, oil and gas
- 1/4" - 1" rated to **2000 PSI** (CWP);  
1 1/4" - 2" rated to **1500 PSI** (CWP)
- Body conforms to ASTM A-351 Grade CF8M
- Ball is 316 stainless steel
- PTFE, glass-filled seat
- Blow-out proof stem design




Size	Part #	Price / E
1/4"	<b>SSBV25RP</b>	<b>\$42.60</b>
3/8"	<b>SSBV38RP</b>	<b>51.00</b>
1/2"	<b>SSBV50RP</b>	<b>58.75</b>
3/4"	<b>SSBV75RP</b>	<b>81.60</b>
1"	<b>SSBV100RP</b>	<b>105.50</b>
1-1/4"	<b>SSBV125RP</b>	<b>154.00</b>
1-1/2"	<b>SSBV150RP</b>	<b>186.55</b>
2"	<b>SSBV200RP</b>	<b>275.00</b>

### 3-Piece Stainless Steel Ball Valves



Full Port  
Female NPT x Female NPT

- 15% glass reinforced RTFE seats
- Full port 3-piece design with female NPT ends
- Swing-out design for easy maintenance
- ISO 5211 mounting pad
- 316 stainless steel stem
- CF8M body and ball
- Spring loaded stem packing using Belleville washers
- Temperature range: **-40°F to 400°F**

Size	PSI @ 65°F	Face to Face Dimensions	Part #	Price / E
1/2"	<b>1000</b>	2.5"	<b>3SSBV50</b>	<b>\$73.40</b>
3/4"	<b>1000</b>	2.9"	<b>3SSBV75</b>	<b>83.00</b>
1"	<b>1000</b>	3.2"	<b>3SSBV100</b>	<b>124.05</b>
1 1/4"	<b>1000</b>	3.7"	<b>3SSBV125</b>	<b>161.50</b>
1 1/2"	<b>1000</b>	4.3"	<b>3SSBV150</b>	<b>227.20</b>
2"	<b>1000</b>	4.8"	<b>3SSBV200</b>	<b>305.95</b>
 2 1/2"	<b>800</b>	6.2"	<b>3SSBV250</b>	<b>548.35</b>
 3"	<b>800</b>	7.5"	<b>3SSBV300</b>	<b>744.65</b>
 4"	<b>600</b>	8.9"	<b>3SSBV400</b>	<b>1165.65</b>