



Tank Truck Fittings

Bayonet Style Dry Disconnect Couplings

Bayco brand BA and BS series bayonet dry disconnect fittings are designed for use in the fuel and lube oil service industry. These fittings are not designed to be interchangeable with other types of Dry Disconnects, however they are used with the Emco Wheaton™ Dry Break™ commonly found in these services. The maximum pressure rating for 2" fittings is **80 PSI @ 70° F**, for pressure ratings at other temperatures contact the factory.



Bayonet Style Dry Disconnect Adapters

Female NPT	Description	Part #	Price/E
2"	adapter with Buna seal	BA31-200	\$218.00
2"	adapter with Viton® seal	BA32-200	225.00



BSS61-200



BS61-200


Bayonet Style Dry Disconnect Couplers

Female NPT	Description	Part #	Price/E
2"	coupler, aluminum 90° swivel with Buna seal	BS61-200	\$800.00
2"	coupler, aluminum 90° swivel with Viton® seal	BS62-200	852.00
2"	coupler, straight swivel with Buna seal	BSS61-200	815.00
2"	coupler, straight swivel with Viton® seal	BSS62-200	870.00

Ball Nozzles for Bulk Delivery

- Rugged construction for rapid fuel oil transfer/delivery
- High flow through a 1" full port ball valve
- Heavy duty roller ball swivel with low temperature seals freely rotates without leaking at **-40°F** and **100 PSI**
- 3 PSI check valve is included to prevent back flow, 5 PSI is optional

Description	Part #	Price/E
1¼" inlet x swivel adapter outlet	BL062	\$617.00
1½" inlet x swivel adapter outlet	BL064	617.00
1¼" inlet x 1¼" spout outlet	BL066	617.00
1½" inlet x 1¼" spout outlet	BL068	617.00
1½" inlet x 1½" spout outlet	BL072	617.00

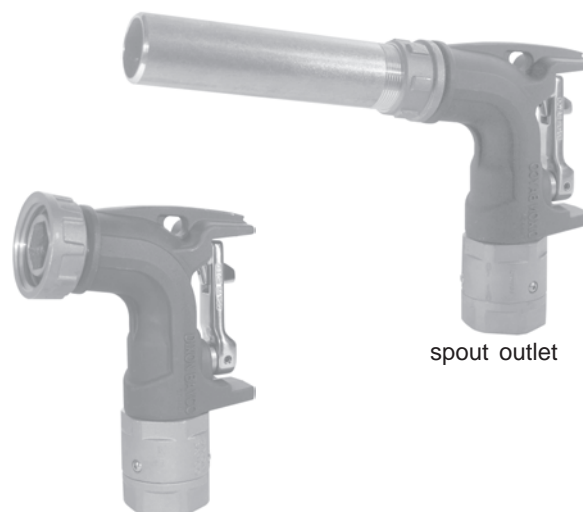

spout outlet

swivel adapter outlet

