

## Tank Truck Fittings

### Automatic Shut-Off Nozzles

- For card lock and truck refueling stations
- Venturi type automatic shut-off
- High pressure design for up to 80 GPM flow (requires minimum 7.5 GPM for auto shut-off)
- Detachable trigger ratchet
- Aluminum construction with bronze trigger



Inlet Size	Spout Size	Part #	Price/E
1¼"	1¼"	<b>1144D</b>	<b>\$630.00</b>
1½"	1½"	<b>1124D</b>	<b>630.00</b>

- same features as above, plus a break away spout
- UL / ULC listed




Inlet Size	Spout Size	Part #	Price/E
1¼"	1¼"	<b>AN125</b>	<b>\$665.00</b>
1½"	1½"	<b>AN150</b>	<b>665.00</b>

### Standard Utility Nozzles

- For use with 12 volt pumps and gravity flow fittings
- Diecast metal body; choice of spouts
- For economy fuel dispensing, including construction, farm and small truck utility tanks
- UL / ULC listed

**Note:** ¾" nozzle inlet uses 1" x ¾" reducer bushing, supplied

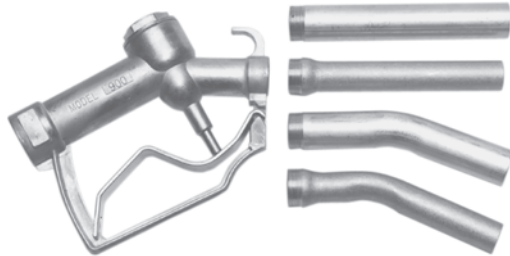

#### Single Piece

Inlet Size	Spout Size	Single Part #	Price/E
1"	1" outlet *	<b>900 *</b>	<b>\$55.00</b>
1"	1" straight	<b>900S</b>	<b>62.00</b>
1"	1" bent	<b>900B</b>	<b>62.00</b>
1"	¾" straight	<b>900W34S</b>	<b>62.00</b>
1"	¾" bent	<b>900W34B</b>	<b>62.00</b>
¾"	¾" straight	<b>900S34</b>	<b>62.00</b>
¾"	¾" bent	<b>900B34</b>	<b>62.00</b>

\* Nozzle body only (without spout)

### Pressure Nozzles for Bulk Delivery

- Manual operation (non-automatic) for high pressures and fuel flow up to 80 GPM
- Easy opening dash pot design with shockless closing
- Detachable trigger ratchet, packing gland and seal
- Aluminum construction with bronze trigger
- Available with aluminum spout or without spout



#### Without Spout

Inlet Size	Spout Size	Part #	Price / Each
1¼"	1¼"	<b>114DNS</b>	<b>\$297.00</b>
1½"	1½"	<b>112DNS</b>	<b>297.00</b>

#### With Spout

Inlet Size	Spout Size	Part #	Price / Each
1¼"	1¼"	<b>114D</b>	<b>\$322.00</b>
1½"	1½"	<b>112D</b>	<b>322.00</b>