

Aluminum Hydrant Wye ¼ Turn Ball Type Hose Valves

- Hardcoated or anodized cast aluminum
- Swivel inlet
- For use up to **200 PSI** (water only)

Female Inlet	(2) Male Outlets	Dixon Part #
4" NH (NST)	2½" NH (NST)	AHWV4025F
4½" NH (NST)	2½" NH (NST)	AHWV4525F
5" Storz	2½" NH (NST)	AHWV50SZ25F
5" Storz	5" Storz	AHWV50SZ50SZ



NST connections




Storz connections

Imported Brass Ball Valves

These valves are designed for control of air, water, oil and gas in hose or pipe lines. For other services, please contact the factory.

- Forged brass bodies
- Blow-out proof stems
- Teflon® seats, seals and thrust washers
- Chrome-plated brass balls and plated steel handles
- Rated to **600 PSI** WOG; **100 PSI** steam
- Temperature range to **320°F**
- ½" - 2": U/L, FM, American Gas Association and Canadian Gas Association Approved
- 2½" - 4": U/L and Canadian Gas Association Approved

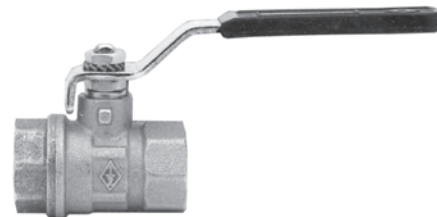

Female NPT	Dixon Part #
½"	FBV50
¾"	FBV75
1"	FBV100
1¼"	FBV125
1½"	FBV150
2"	FBV200



Female NPT	Dixon Part #
2½"	FBV250
3"	FBV300
4"	FBV400