




Double Clapper Siamese Connections

21-132



21-132
"Y" type - (back outlet)

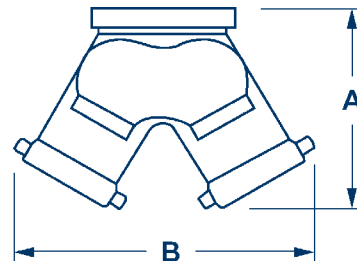

Size	Dimensions (inches)	
	A	B
^{1,2} 4 x 2½ x 2½	9-5/8	12-1/4
6 x 2½ x 2½	10-1/4	11-3/4
^{1,2,3} 4 x 3 x 3	10	12-1/2
^{2,3} 6 x 3 x 3	10-3/8	12-1/2

- ¹ Approved by Factory Mutual
- ² Approved by Underwriters Laboratories
- ³ Approved by New York City Board of Standards and Appeals

Double drop clapper with (2) pin lug swivel inlets. Provides the required 500 gpm minimum to supplement the fire protection as an auxiliary inlet connection to the water supply. (250 GPM minimum per inlet.) Exposed Fire Department Connections (FDC) provide an economical method of satisfying local fire codes.

- Cast brass finish
- U/L listed and FM approved
- Branding: *see below*
- For use up to **175 PSI**

- P polished
- C polished chrome plated

Back Outlet - (Y)

Outlet Female NPT	(2) Inlets Female	Branding	Dixon Part #	Powhatan Part #
4"	2½" NH(NST)	AutoSprinkler	DCS4025F	21-132-00016
		AutoSprinkler	DCS4025F-P	21-132-00017
		AutoSprinkler	DCS4025F-C	21-132-00018
		StandPipe	DCS4025F-SP	21-132-00031
		No Branding	DCS4025F-NB	21-132-00037
4"	3" NYFD 3" NH(NST)	AutoSprinkler	DCS4030NYFD	21-132-00043
		AutoSprinkler	DCS4030F	21-132-00048
6"	2½" NH(NST)	StandPipe	DCS6025F-SP	21-132-00055
		AutoSprinkler	DCS6025F	21-132-00061

- Not all configurations are stocked
- Other sizes and threads are also available, consult the factory for pricing and availability