

Brass Clapper Type Snoots - Pin Lug



CSCTF25F30T



CSCTM25F30T

- brass
- Other configurations are also available. *Consult the factory for pricing and availability.*
- P polished
- C polished chrome plated

Female NPT Outlet	Female NH (NST) Inlet	Dixon Part #
3"	2½"	CSCTF25F30T-P CSCTF25F30T-C
3"	2½"	
Male NPT Outlet	Female NH (NST) Inlet	Dixon Part #
3"	2½"	CSCTM25F30T-P CSCTM25F30T-C
3"	2½"	

Brass Spring Check Type Snoots - Pin Lug


25-288 / 25-289

- **25-288:** female NPT rigid with hexagon by 2½" female hose thread to swivel. Connections are attached to the 25-416 or 25-417 bodies with pipe nipples (not included).
- **25-289:** 3" male NPT x 2½" female hose thread to swivel. Used when a direct connection to 25-416 or 25-417 bodies is desired.

- Brass
- For use up to **175 PSI**
- Other configurations are also available. *Consult the factory for pricing and availability.*
- P polished
- C polished chrome plated


- **Note:** Under no circumstances should a 25-289 check snoot be installed directly into a pipe, as this may prevent the snoot from opening. Install directly into the appropriate standpipe body only.

25-288

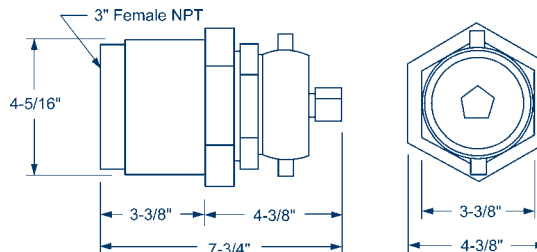

Female NPT Outlet	Female NH (NST) Inlet	Dixon Part #	Powhatan Part #
3"	2½"	CSSTF25F30T-P CSSTF25F30T-C CSSTF30F30T-P	25-288-00002
3"	2½"		25-288-00003
3"	3"		25-288-00007

25-289

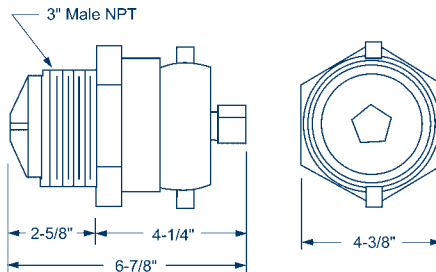

Male NPT Outlet	Female NH (NST) Inlet	Dixon Part #	Powhatan Part #
3"	2½"	CSSTM25F30T-P CSSTM25F30T-C	25-289-00001
3"	2½"		25-289-00002