


## Storz with Locks x Long Handle Swivel Female Adapter

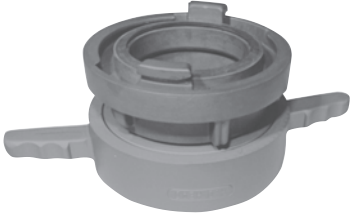


- Hardcoated aluminum

Storz Size	Female NH (NST)	Dixon Part #
5"	4"	<b>SZLSF5040F</b>
5"	4½"	<b>SZLSF5045F</b>

- Other configurations are also available.  
*Consult the factory for pricing and availability.*

## Storz x Storz Adapter with Locks



- Hardcoated aluminum

Storz Size	Storz Size	Dixon Part #
4"	5"	<b>SZSZ4050</b>

- Other configurations are also available.  
*Consult the factory for pricing and availability.*

## Storz Mounting Plate



- Anodized aluminum

Storz Size	Dixon Part #
4"	<b>SZMP400</b>
5"	<b>SZMP500</b>

## Storz Hydrant Conversion Fitting without Locks



Allows a fixed conversion of a fire hydrant for direct use with Storz connections. Red Powder Coated Aluminum with Pentagon Cap and Cable. Both the Adapter and the Pentagon Cap are provided without locks. The elimination of the locks speeds connection to the hydrant when every second counts. A lock should be provided by the mating hose connection.

Storz Size	Female NH (NST)	Dixon Part #
5"	4½"	<b>SZHC5045F-WPC</b>

## Storz Blind Cap with Chain without Locks



- Anodized aluminum

Storz Size	Dixon Part #
1½"	<b>SZC150</b>
2"	<b>SZC200</b>
4"	<b>SZC400</b>
5"	<b>SZC500</b>
6"	<b>SZC600</b>

## Storz Face Gaskets

All Storz gasket faces should be kept free of sand, grit, etc. and lubricated with light film of petroleum jelly or silicone. Although silicone spray is convenient, it does not last as long as petroleum jelly.

Storz Size	Application	Dixon Part #
4"	Pressure	<b>SZG400P</b>
4"	Suction	<b>SZG400S</b>
5"	Pressure	<b>SZG500P</b>
5"	Suction	<b>SZG500S</b>

The Pressure Seals have

a flat face 

The Suction Seals have

a beaded face 