


3U-Series 4-in-1 Universal Coupler (3/8" Size)

- U-Series 3/8" couplers are the first 4-in-1, accepting: ARO 310, Industrial, Truflate, and CEJN 410.
- Universal couplers have a high concentration of locking balls to reduce incidents of brinneling during operation.
- Euro-style valving ensures maximum flow performance and automatic connection with minimal force required.
- Couplers have a sleeve-guard 'Lip' to reduce the risk of accidental disconnection while in service.
- Seal location allows each nipple to maximize sealing performance at all pressures in a variety of environments

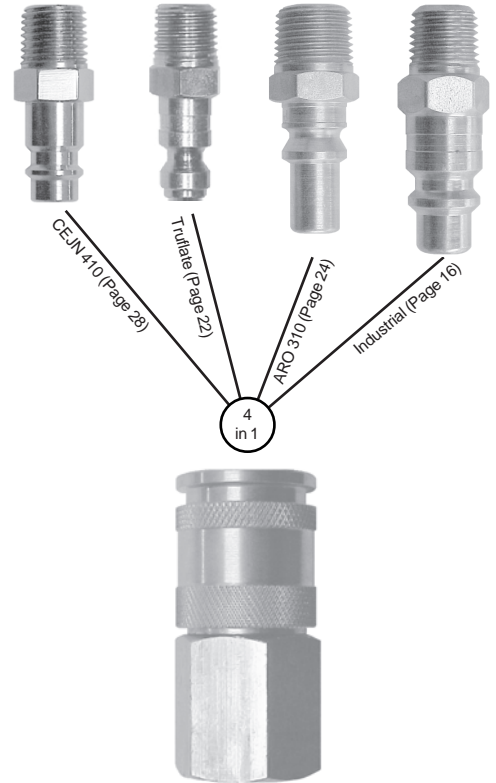

3U-Series


Performance Specifications	Operating Bar (PSI)	Min. Burst Bar (PSI)	Flow $\Delta P=0.4$ Bar (6.9 Bar Inlet)	Locking Mechanism
3/8"	14 (200)	69 (1,000)	136 CFM	6 Balls

Please Note: Operating and flow specifications are dependent upon the nipple that is inserted into the coupler. The lower performance rating between the coupler or nipple must take precedence.

'3U' Coupler Equivalent	Parker	Hansen	Coilhose	Tomco
3/8"	-	-	-	-

U-Series 3/8" Universal (Automatic Coupler)


Part Number	Body Size	Thread Size	Body Material	Weight (lb)	List Price	Bag Qty	Pack Qty
3UF3-B	3/8"	3/8"-18 NPTF	brass	0.31	\$29.26	10	50



(Female Thread)

U-Series 3/8" Universal (Automatic Coupler)


Part Number	Body Size	Thread Size	Body Material	Weight (lb)	List Price	Bag Qty	Pack Qty
3UM3-B	3/8"	3/8"-18 NPTF	brass	0.30	\$29.26	10	50



(Male Thread)

U-Series 3/8" Universal (Automatic Coupler)

Part Number	Body Size	Barb Configuration	Body Material	Weight (lb)	List Price	Bag Qty	Pack Qty
3US3-B	3/8"	3/8" Hose Barb	brass	0.31	\$30.39	10	50

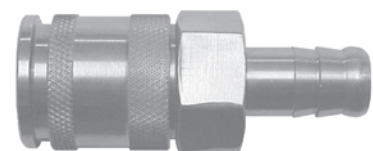

(Standard Hose Barb)

Although the Universal coupler permits multiple series nipples to mate with one coupler, it is recommended to match series couplers and nipples. When using a Universal coupler, the lower performance rating between the coupler and nipple must take precedence.



Attention Required!