



CJ-Series European High-Flow Interchange

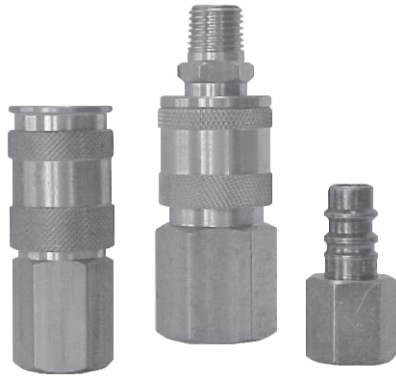

- CJ-Series European Interchange couplings will provide up to 50% more air flow than standard North American pneumatic couplings.
- All couplers have a high concentration of locking balls to reduce incidents of brinelling during operation.
- CJ-Series 1/4" nipples are available in standard or 'LG' locking-groove variations to maximize international interchangeability.
- Couplers have a sleeve-guard 'Lip' to reduce the risk of accidental disconnection while in service.
- Pneumatically energized seal molds itself to the nipples to maximize sealing performance at all pressures.

Performance Specifications	Operating Bar (PSI)	Min. Burst Bar (PSI)	Flow $\Delta P=0.4\text{Bar}$ (6.9 Bar Inlet)	Locking Mechanism
1/4"	21 (300)	145 (2,100)	70 CFM	6 Balls
3/8"	21 (300)	141 (2,050)	136 CFM	6 Balls
'CJ' Coupler Interchange	Coilhose	Amflo	Rectus	CEJN
1/4"	Megaflow™	Hi-Flo™	25KA/26KA	Series 320
3/8"	---	---	27KA	Series 410
'CJ' Nipple Interchange	Coilhose	Amflo	Rectus	CEJN
1/4"	Megaflow™	Hi-Flo™	25KA/26KA	Series 320
1/4" (LG)	---	Hi-Flo™	25KA/26KA/25KS	Series 320
3/8"	---	---	27KA	Series 410


CJ-Series CEJN 320/410 Interchange (Automatic Coupler)



(Female Thread)

Part Number	Body Size	Thread Size	Body Material	Weight (lb)	List Price	Bag Qty	Pack Qty
2CJF2-B	1/4"	1/4"-18 NPTF	brass	0.26	\$13.15	10	100
F-2CJF2-S	1/4"	1/4"-18 NPTF	303 SS	0.27	55.86	10	100
2CJBF2-B	1/4"	G1/4" BSPP	brass	0.26	13.15	10	100
F-2CJBF2-S	1/4"	G1/4" BSPP	303 SS	0.27	55.86	10	100
2CJF3-B	1/4"	3/8"-18 NPTF	brass	0.27	13.64	10	100
2CJBF3-B	1/4"	G3/8" BSPP	brass	0.27	13.64	10	100
3CJF3-B	3/8"	3/8"-18 NPTF	brass	0.46	26.87	10	50
3CJBF3-B	3/8"	G3/8" BSPP	brass	0.46	26.87	10	50
3CJF4-B	3/8"	1/2"-14 NPTF	brass	0.51	28.78	10	50
3CJBF4-B	3/8"	G1/2" BSPP	brass	0.51	28.78	10	50

CJ-Series CEJN 320/410 Interchange (Nipple)



(Female Thread)

Part Number	Body Size	Thread Size	Body Material	Weight (lb)	List Price	Bag Qty	Pack Qty
CJ2F2-LG	1/4"	1/4"-18 NPTF	steel	0.07	\$2.91	10	100
CJ2F2-B	1/4"	1/4"-18 NPTF	brass	0.06	2.97	10	100
CJ2F2-S	1/4"	1/4"-18 NPTF	303 SS	0.06	4.89	10	100
CJ2BF2-LG	1/4"	G1/4" BSPP	steel	0.07	2.91	10	100
CJ2BF2-B	1/4"	G1/4" BSPP	brass	0.06	2.97	10	100
CJ2BF2-S	1/4"	G1/4" BSPP	303 SS	0.06	4.89	10	100
CJ2F3-LG	1/4"	3/8"-18 NPTF	steel	0.10	3.80	10	100
CJ2F3-B	1/4"	3/8"-18 NPTF	brass	0.09	3.74	10	100
CJ2BF3-LG	1/4"	G3/8" BSPP	steel	0.10	3.80	10	100
CJ2BF3-B	1/4"	G3/8" BSPP	brass	0.09	3.74	10	100
CJ2BF3-S	1/4"	G3/8" BSPP	303 SS	0.09	5.49	10	100
CJ3F3	3/8"	3/8"-18 NPTF	steel	0.15	3.82	10	50
CJ3F3-B	3/8"	3/8"-18 NPTF	brass	0.15	3.50	10	50
CJ3BF3	3/8"	G3/8" BSPP	steel	0.15	3.82	10	50
CJ3BF3-B	3/8"	G3/8" BSPP	brass	0.15	3.50	10	50
CJ3F4	3/8"	1/2"-14 NPTF	steel	0.20	4.61	10	50
CJ3F4-B	3/8"	1/2"-14 NPTF	brass	0.20	3.89	10	50
CJ3BF4	3/8"	G1/2" BSPP	steel	0.20	4.61	10	50
CJ3BF4-B	3/8"	G1/2" BSPP	brass	0.20	3.89	10	50