

N-Series Interchange (Tangle-Prevention Coupler)



Part Number	Body Size	Barb Configuration	Body Material	Weight (lb)	List Price	Bag Qty	Pack Qty
4NCS6-TP	1/2"	3/4" hose barb	steel	0.45	\$34.17	---	25

N-Series Mega-Bowes Interchange (Coupler)



(Female Thread)

Part Number	Body Size	Thread Size	Body Material	Weight (lb)	List Price	Bag Qty	Pack Qty
10NF8-B	1-1/4"	1"-11 1/2 NPTF	brass	0.60	\$100.27	---	10
10NF10-B	1-1/4"	1-1/4"-11 1/2 NPTF	brass	0.65	138.89	---	10

N-Series Mega-Bowes Interchange (Nipple)



(Female Thread)

Part Number	Body Size	Thread Size	Body Material	Weight (lb)	List Price	Bag Qty	Pack Qty
N10F8-B	1-1/4"	1"-11 1/2 NPTF	brass	1.31	\$125.93	---	10
N10F10-B	1-1/4"	1-1/4"-11 1/2 NPTF	brass	1.38	188.22	---	10


N-Series Mega-Bowes Interchange (Coupler)



(Male Thread)

Part Number	Body Size	Thread Size	Body Material	Weight (lb)	List Price	Bag Qty	Pack Qty
10NM8-B	1-1/4"	1"-11 1/2 NPTF	brass	0.72	\$127.89	---	10
10NM10-B	1-1/4"	1-1/4"-11 1/2 NPTF	brass	0.74	127.89	---	10

N-Series Mega-Bowes Interchange (Nipple)

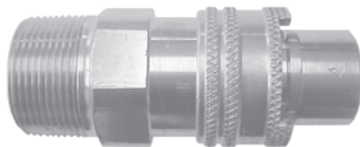

(Male Thread)


Part Number	Body Size	Thread Size	Body Material	Weight (lb)	List Price	Bag Qty	Pack Qty
N10M8-B	1-1/4"	1"-11 1/2 NPTF	brass	1.29	\$136.62	---	10
N10M10-B	1-1/4"	1-1/4"-11 1/2 NPTF	brass	1.35	140.52	---	10

A Safety Check Valve, also known as an Excessive Flow Sensor (page 46), should be installed at the source of supply to protect the operator in case of coupling failure or hose rupture.

OSHA Regulation Standards - 29CFR, 926.302(b)(7): All hoses exceeding 1/2" inside diameter shall have a safety device at the source of supply or branch line to reduce pressure in case of hose failure.



Attention Required!

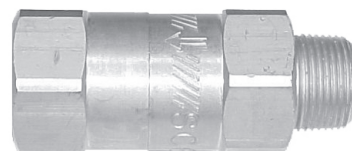

(Excessive Flow Sensor - page 46)