
CVV-Series European Screw-Together Interchange

- Threaded sleeves enable easy connection and disconnection while system is under pressure.
- O-ring "Connected" marker is highly visible during connection and helps to keep contaminents out of the threads while connected.
- Unique thread profile ensures smooth connection and industry-wide interchangeability.
- Highly versatile design is ideally suited for hydraulic systems experiencing pressure spikes or impulses.
- Corrosion resistant high strength components maximize service life in a variety of applications.

Performance Specifications	Operating Bar (PSI)	Coupled Burst Bar (PSI)	Flow Rate ∆P=1 Bar	Locking Mechanism
1/4" steel 3/8" steel 1/2" steel 3/4" steel 1" steel 1-1/4" steel	450 (6,500) 450 (6,500) 400 (5,800) 400 (5,800) 330 (4,785)	1,800 (26,100) 1,800 (26,100) 1,260 (18,270) 1,200 (17,400) 1,000 (14,500)	13LPM (3.4 GPM) 28 LPM (7.5 GPM) 189 LPM (13 GPM) 102 LPM (27 GPM) 159 LPM (42 GPM) 305 LPM (81 GPM)	Threaded Threaded Threaded Threaded Threaded Threaded
CV/// Series				





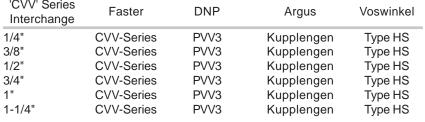

Part	Body	Cap	Body	Weight	List	Bag	Pack
Number	Size	Lanyard	Material	(lb)	Price	Qty	Qty
2CVVDP	1/4"	plastic	plastic	0.02	\$14.93	5	25
3CVVDP	3/8"	plastic	plastic	0.03	6.07	5	25
4CVVDP	1/2"	plastic	plastic	0.06	7.00	5	25
6CVVDP	3/4"	plastic	plastic	0.07	7.25	5	25
8CVVDP	1"	plastic	plastic	0.08	7.31	5	25
10CVVDP	1-1/4"	plastic	plastic	0.11	13.84		10

Part Number	Body Size	Cap Lanyard	Body Material	Weight (lb)	List Price	Bag Qty	Pack Qty
CVV2DC	1/4"	plastic	plastic	0.02	\$14.93	5	25
CVV3DC	3/8"	plastic	plastic	0.03	5.06	5	25
CVV4DC	1/2"	plastic	plastic	0.04	5.44	5	25
CVV6DC	3/4"	plastic	plastic	0.08	6.10	5	25
CVV8DC	1"	plastic	plastic	0.10	6.22	5	25
CVV10DC	1-1/4"	plastic	plastic	0.15	9.57		10

GOODYEAR

Call Toll Free: 1-866-711-4673

WebSales@GoodyearRubberProducts.com



We Ship World Wide