



## SHD-Series Schrader/Rectus '17' Interchange

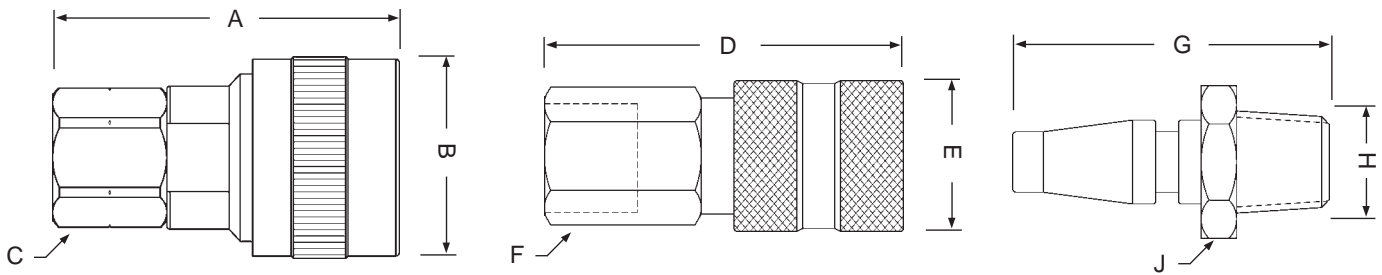

Body Size	End Size	Female NPT(F)	Female BSPP	Female ORB	Male NPT(F)	Male BSPT	Male ORB	Male JIC 37°	Hose Barb	Push-Loc Barb	Reusable Barb	Max. O.D.	Hex Size		
TL Coupler												Dimension 'A'		'B'	'C'
1/4"	1/4"	53.3mm			56.4mm				64.5mm			28.4mm	11/16"		
1/4"	3/8"	55.4mm			57.9mm				67.8mm			28.4mm	11/16"		
1/2"	3/8"	65.8mm			64.8mm				76.0mm			38.1mm	1-1/8"		
1/2"	1/2"	67.6mm			66.3mm				107.4mm			38.1mm	1-1/8"		
1/2"	3/4"	71.4mm			-				-			38.1mm	1-1/8"		
Auto Coupler												Dimension 'D'		'E'	'F'
1/4"	1/4"	51.0mm	51.0mm		53.0mm	53.0mm			60.0mm			22.0mm	17.0mm		
1/4"	3/8"	-	-		-	-			65.0mm			22.0mm	17.0mm		
Nipple												Dimension 'G'		'H'	'J'
1/4"	1/8"	37.9mm	-		39.1mm	-			-			16.5mm	11/16"		
1/4"	1/4"	41.2mm	41.2mm		43.7mm	43.7mm			51.6mm			16.5mm	11/16"		
1/4"	3/8"	-	-		-	-			56.4mm			16.5mm	11/16"		
1/2"	1/4"	-	-		46.0mm	-			-			20.3mm	7/8"		
1/2"	3/8"	45.5mm	-		47.5mm	-			59.4mm			20.3mm	7/8"		
1/2"	1/2"	-	-		51.6mm	-			64.3mm			20.3mm	7/8"		

## SCV-Series Excessive Flow Sensor/Check Valve

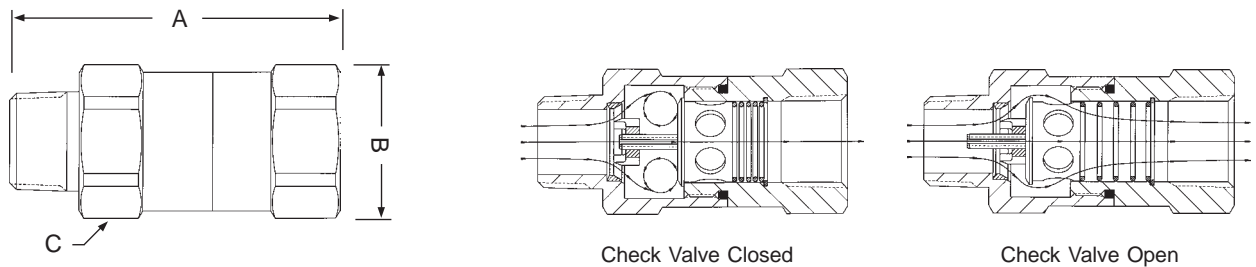

Body Size	End Size	Female NPT(F)	Female BSPP	Female ORB	Male NPT(F)	Male BSPT	Male ORB	Male JIC 37°	Hose Barb	Push-Loc Barb	Reusable Barb	Max. O.D.	Hex Size		
SCV-Series Excessive Flow Sensor/Check Valve												Dimension 'A'		'B'	'C'
1/4"	1/4"	55.6mm	55.6mm									22.1mm	3/4"		
3/8"	3/8"	62.0mm	62.0mm									29.5mm	1"		
1/2"	1/2"	73.9mm	73.9mm									33.0mm	1-1/8"		
3/4"	3/4"	90.4mm	90.4mm									43.9mm	1-1/2"		
1"	1"	108.7mm	108.7mm									55.1mm	1-7/8"		
1-1/4"	1-1/4"	114.3mm	114.3mm									66.0mm	2-1/4"		
1-1/2"	1-1/2"	138.9mm	138.9mm									80.0mm	2-7/8"		
2"	2"	159.5mm	159.5mm									102.6mm	3-1/2"		
3"	3"	228.6mm	228.6mm									153.9mm	5-1/4"		

Dimensions