


CM-Series Mold Coolant Interchange

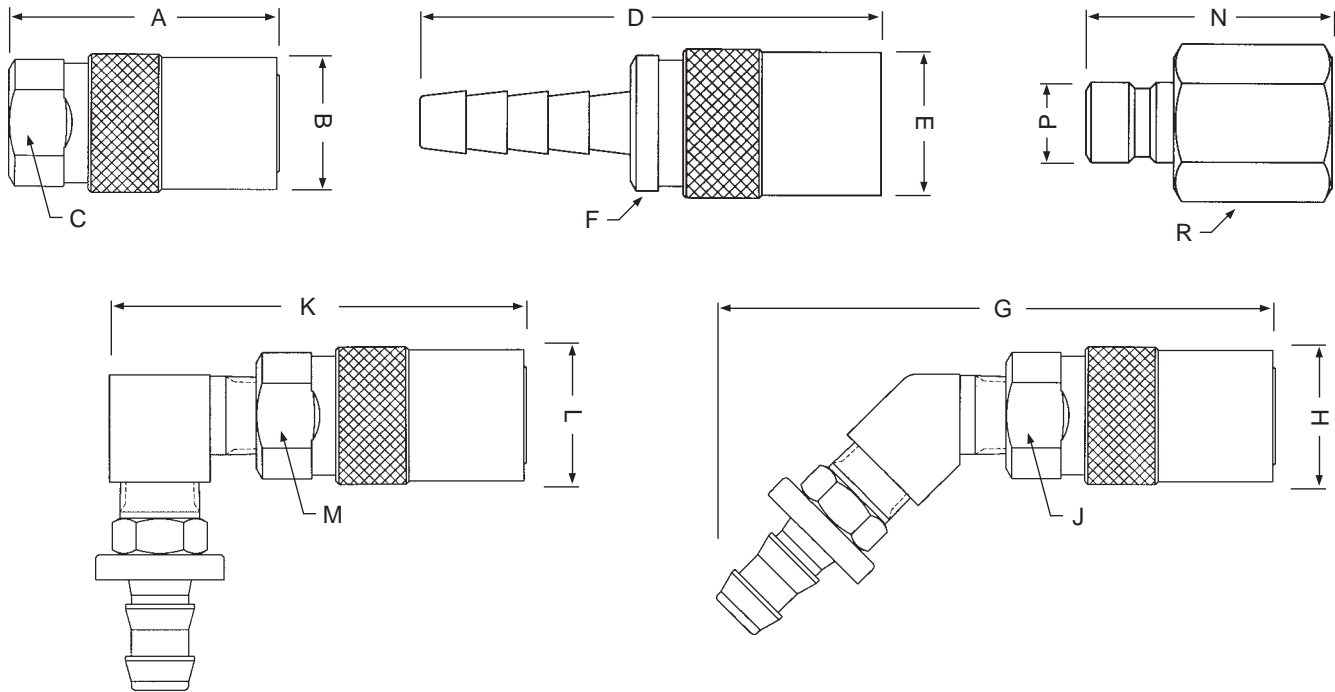

Body Size	End Size	Female NPT(F)	Female BSPP	Female ORB	Male NPT(F)	Male BSPT	Male ORB	Male JIC 37°	Hose Barb	Push-Loc Barb	Reusable Barb	Max. O.D.	Hex Size		
Coupler (1)												Dimension 'A'		'B'	'C'
1/4"	1/8"	20.0mm										18.0mm	14.0mm		
3/8"	1/4"	41.0mm										24.0mm	22.0mm		
1/2"	1/2"	57.0mm										30.0mm	28.0mm		
Coupler (2)												Dimension 'D'		'E'	'F'
1/4"	1/4"								53.0mm	50.5mm		18.0mm	14.0mm		
1/4"	5/16"								55.5mm	-		18.0mm	14.0mm		
1/4"	3/8"								58.0mm	55.5mm		18.0mm	14.0mm		
3/8"	3/8"								75.0mm	71.5mm		24.0mm	22.0mm		
3/8"	1/2"								80.0mm	76.5mm		24.0mm	22.0mm		
1/2"	1/2"								85.0mm	82.8mm		30.0mm	28.0mm		
1/2"	3/4"								90.0mm	87.8mm		30.0mm	28.0mm		
Coupler (3)												Dimension 'G'		'H'	'J'
1/4"	1/4"								33.0mm	30.5mm		18.0mm	14.0mm		
1/4"	5/16"								38.0mm	-		18.0mm	14.0mm		
1/4"	3/8"								43.0mm	40.5mm		18.0mm	14.0mm		
3/8"	3/8"								56.0mm	52.5mm		24.0mm	22.0mm		
3/8"	1/2"								58.0mm	55.5mm		24.0mm	22.0mm		
1/2"	1/2"								86.0mm	83.8mm		30.0mm	28.0mm		
1/2"	3/4"								94.0mm	91.8mm		30.0mm	28.0mm		
Coupler (4)												Dimension 'K'		'L'	'M'
1/4"	1/4"								42.0mm	40.0mm		18.0mm	14.0mm		
1/4"	5/16"								42.0mm	-		18.0mm	14.0mm		
1/4"	3/8"								44.0mm	42.0mm		18.0mm	14.0mm		
3/8"	3/8"								56.0mm	53.8mm		24.0mm	22.0mm		
3/8"	1/2"								58.0mm	55.8mm		24.0mm	22.0mm		
1/2"	1/2"								60.0mm	57.0mm		30.0mm	28.0mm		
1/2"	3/4"								60.0mm	57.0mm		30.0mm	28.0mm		
Nipple												Dimension 'N'		'P'	'R'
1/4"	1/8"	24.6mm			23.6mm							9.4mm	11.0mm		
1/4"	1/4"	25.5mm			28.6mm							9.4mm	14.0mm		
1/4"	3/8"	25.5mm			30.6mm							9.4mm	17.0mm		
3/8"	1/4"	25.0mm			33.0mm							13.5mm	14.0mm		
3/8"	3/8"	35.0mm			34.0mm							13.5mm	17.0mm		
3/8"	1/2"	35.0mm			34.0mm							13.5mm	17.0mm		
1/2"	1/2"	38.2mm			42.2mm							19.9mm	24.0mm		
1/2"	3/4"	44.2mm			46.5mm							19.9mm	26.0mm		

Dimensions