




## 316L Angle Sample Valve

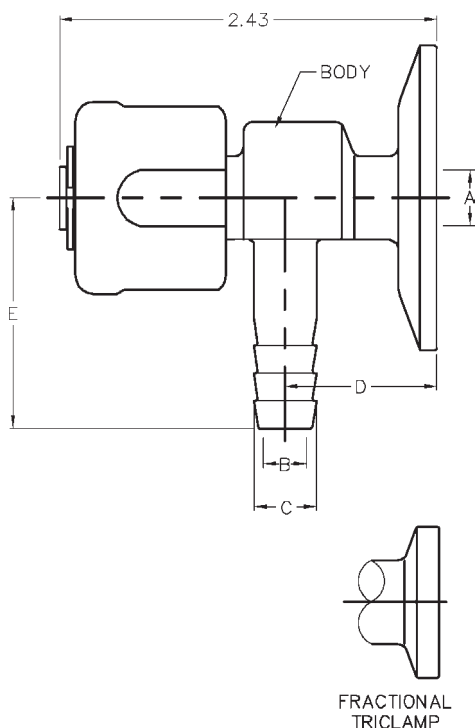

- all 316L stainless wetted part construction
- standard finish to 20 R<sub>a</sub> ID / 32 R<sub>a</sub> OD
- Viton® stem seal FDA approved
- fully traceable (*material test reports*)
- domed virgin Teflon® seat for positive closure
- tapered sanitary clamp connection prevents product back flow when installed in-line
- set screw stop prevents accidental removal of stem from valve body
- black nylon nut cover allows hand operation even with hot products
- minimal internal dead-leg area
- end connections available: clamp and butt weld
- sizes available: ½" thru 1½"
- temperature rating: 300° @ 200 PSI

K

Size		Part Number	Dimensions (in)					Weight (lbs)
clamp	barb		A	B	C	D	E	
½"	¼"	BSVACV-R050025	0.218	0.187	0.312	0.972	1.50	0.250
½"	⅜"	BSVACV-R050375	0.218	0.218	0.405	0.952	1.50	0.375
½"	½"	BSVACV-R050050	0.218	0.375	0.540	0.878	1.50	0.500
1"	⅜"	BSVACV-R100375	0.218	0.218	0.405	0.985	1.50	0.500
1½"	¼"	BSVACV-R150025	0.218	0.187	0.312	0.987	1.50	0.500
1½"	⅜"	BSVACV-R150375	0.218	0.218	0.405	0.985	1.50	0.500
2"	¼"	BSVACV-R200025	0.218	0.187	0.312	0.987	1.50	0.750

### Repair Kit for Angle Sample Valve

Part Number	Description	Material	Qty.
BSVA-RKS	seal	Teflon®	1
	O-ring	Viton®	1