

# STYLE CG & CGI TO SUIT LARGE DIAMETER FLANGES CLASS 75-125

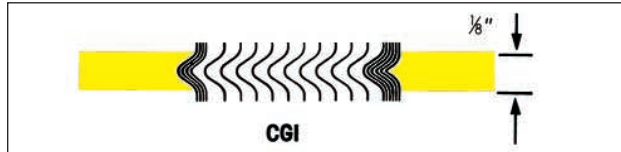
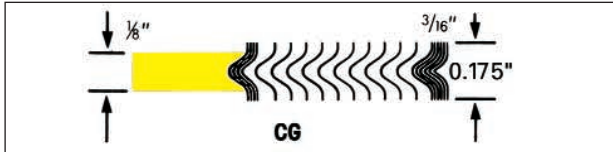


TABLE 8

CLASS 75 - SLIP-ON AND BLIND†				CLASS 75 - WELD-NECK AND BLIND†				CLASS 125			
Nom. Pipe Size	Sealing Element		Centering Ring Outside Dia.	Nom. Pipe Size	Sealing Element		Centering Ring Outside Dia.	Nom. Pipe Size	Sealing Element		Centering Ring Outside Dia.
	Inside Dia.	Outside Dia.			Inside Dia.	Outside Dia.			Inside Dia.	Outside Dia.	
26	27	28 1/4	30 1/8	26	26 1/2	27 3/4	28 3/4	26	26 1/2	27 3/4	30 1/2
28	29	30 1/4	32 1/8	28	28 1/2	29 3/4	30 3/4	28	28 1/2	29 3/4	32 3/4
30	31	32 1/4	34 1/8	30	30 1/2	31 3/4	32 3/4	30	30 1/2	31 3/4	34 3/4
32	33 3/8	34 3/8	36 3/8	32	32 1/2	33 3/4	35 1/8	32	32 1/2	33 3/8	37
34	35 1/8	36 1/2	38 3/8	34	34 1/2	35 7/8	37 1/8	34	34 1/2	35 1/8	39
36	37 1/8	38 1/2	40 3/8	36	36 1/2	37 7/8	39 1/8	36	36 1/2	38 1/8	41 1/4
38	-	-	-	38	-	-	-	38	38 1/2	40 1/8	43 3/4
40	-	-	-	40	-	-	-	40	40 1/2	42 1/8	45 3/4
42	43 1/4	44 3/4	46 5/8	42	42 1/2	44	45 5/8	42	42 1/2	44 1/4	48
44	-	-	-	44	-	-	-	44	44 1/2	46 3/8	50 1/4
46	-	-	-	46	-	-	-	46	46 1/2	48 3/8	52 1/4
48	49 1/4	50 3/8	52 5/8	48	48 1/2	50 1/8	51 5/8	48	48 1/2	50 3/8	54 1/2
50	-	-	-	50	-	-	-	50	50 1/2	52 1/2	56 1/2
52	-	-	-	52	-	-	-	52	52 1/2	54 1/2	58 3/4
54	55 3/8	57 3/4	59 1/8	54	54 1/2	56 3/8	57 7/8	54	54 1/4	56 1/2	61
60	61 3/8	63 3/8	65 1/8	60	60 1/2	62 1/2	63 3/8	60	60 1/2	62 1/2	67 1/2
66	67 1/2	69 1/2	71 3/4	66	66 1/2	68 1/2	70 1/4	66	71	72 3/4	74 1/4
72	73 1/2	75 1/2	77 3/4	72	72 1/2	74 1/2	76 1/4	72	77 1/2	79 1/4	80 3/4
84	-	-	-	84	-	-	-	84	90 1/4	92	93 1/2
96	-	-	-	96	-	-	-	96	103	104 3/4	106 1/4

DIMENSIONS IN INCHES.

GASKET THICKNESS. TO ENSURE GREATER GASKET STABILITY; FOR LARGER DIAMETER ABOVE 39" (1000 mm) WE RECOMMEND 7.2 mm (0.285 in) THICK GASKETS WITH 5.0 mm (0.197 in) THICK GUIDE RINGS, OR 6.4 mm (0.250 in) THICK GASKETS WITH 4.8 mm (0.188 in) THICK GUIDE RINGS.

†OUTSIDE DIAMETER, FACING DIAMETER AND DRILLING OF CLASS 75 BLIND FLANGES DEPEND ON WHETHER THEY ARE TO BE USED AGAINST WELD-NECK OR SLIP-ON FLANGES.

\*WHERE STYLE CGI GASKETS ARE REQUIRED, INNER RING I.D. MUST BE SPECIFIED. STANDARD PRACTICE IS TO USE INNER RINGS WITH AN I.D. THAT IS 3.2 mm (0.125 in.) GREATER THAN THE FLANGE BORE.

THE ANSWER IS ALWAYS

*Flexitallic*

**GOODYEAR**  
RUBBER PRODUCTS INC.

Call Toll Free: **1-866-711-4673**

WebSales@GoodyearRubberProducts.com

**We Ship  
World Wide**