




# BLACKHAWK PD™

## 8M




Available Sizes

PITCH LENGTH (mm)		
480	1040	2104*
536*	1056*	2000
560	1120	2400
600	1184*	2600
640	1200	2800
680*	1248*	3048
720	1280	3280
800	1320*	3600
840*	1400*	4400
856*	1440	
880	1600	
896*	1760	
960	1800	
968*	1904*	

Stock Widths: 20mm, 30mm, 50mm, 85mm

\*Nonstock, made to order. Minimum quantities required.

## 14M



Available Sizes

PITCH LENGTH (mm)		
966	2450	4578
1190	2590	4956
1400	2800	5320
1610	3150	5740
1778	3360	6160
1890	3500	6860
2100	3850	
2310	4326	


Stock Widths: 40mm, 55mm, 85mm, 115mm, 170mm

SYNCHRONOUS

## BLACKHAWK PD SPROCKETS

### SPROCKET TYPES

The following types of sprockets are available for BlackHawk Pd Belts. Sketches are shown with the Sure-Grip bushing in place.

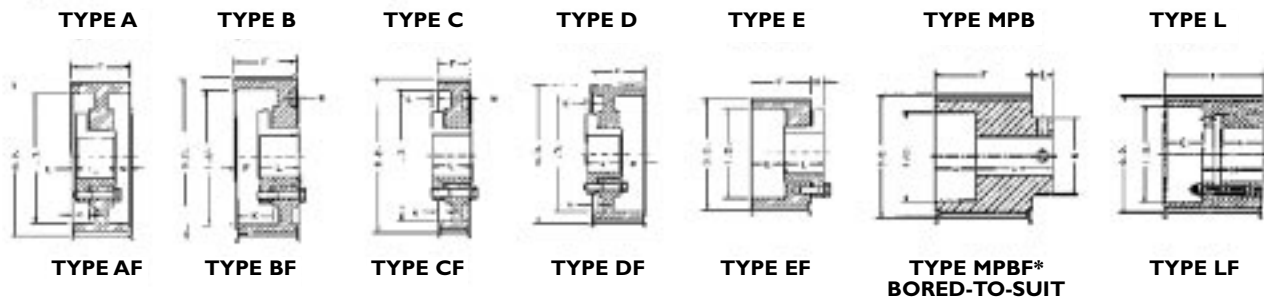

The figure following the sketch reference letter in the "Type" column indicates the construction of the sprocket (1=Solid, 2=Web, and 3=Arms), and the letter "F" indicates that the sprocket has flanges.

FOR FULL PRODUCT AVAILABILITY AND SPECIFICATIONS,  
PLEASE VISIT [WWW.GODYEARPTP.COM](http://WWW.GODYEARPTP.COM) OR CONTACT A GOODYEAR REPRESENTATIVE.