




DUAL HI-PERFORMANCE PD™ & DUAL POSITIVE DRIVE

SYNCHRONOUS


DUAL HI-PERFORMANCE PD

8M



Part Number	No. of Teeth	Part Number	No. of Teeth
D720 8M	90	D1800 8M	225
D800 8M	100	D2000 8M	250
D880 8M	110	D2400 8M	300
D960 8M	120	D2600 8M	325
D1040 8M	130	D2800 8M	350
D1120 8M	140	D3048 8M	381
D1200 8M	150	D3280 8M	410
D1280 8M	160	D3600 8M	450
D1440 8M	180	D4400 8M	550
D1600 8M	200	Available in 20, 30, 50 & 85 mm widths.	
D1760 8M	220		


14M

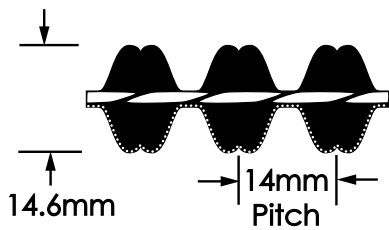

Part Number	No. of Teeth	Part Number	No. of Teeth
D1400 14M	100	D3500 14M	250
D1610 14M	115	D3850 14M	275
D1778 14M	127	D4326 14M	309
D1890 14M	135	D4578 14M	327
D2100 14M	150	D6160 14M	440
D2450 14M	175	Available in 40, 55, 85 & 115 mm widths.	
D3150 14M	225		

DUAL POSITIVE DRIVE

XL (EXTRA LIGHT)




1/5-inch pitch
For business machines, instruments, sound equipment, etc.

XL Part Numbers		
D60XL	D170XL	D290XL
D70XL	D180XL	D300XL
D80XL	D190XL	D310XL
D90XL	D200XL	D330XL
D100XL	D210XL	D362XL
D110XL	D220XL	D392XL
D120XL	D230XL	D450XL
D130XL	D240XL	D492XL
D140XL	D250XL	D690XL
D150XL	D260XL	D900XL
D160XL	D280XL	

Stock Widths* 1/4 inch=025, 3/8 inch=037

L (LIGHT)




3/8-inch pitch
For fraction power-rated motor applications such as in-home appliances, small tools, pumps, etc.

L Part Numbers		
D124L	D300L	D480L
D150L	D322L	D510L
D187L	D345L	D540L
D210L	D367L	D600L
D225L	D390L	D660L
D270L	D420L	
D285L	D450L	

Stock Widths* 1/2 inch=050, 3/4 inch=075, 1 inch=100

H (HEAVY)

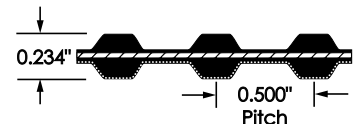

1/2-inch pitch
For machine tools, pumps, fans, presses, motor generator sets, etc.

H Part Numbers		
D240H	D480H	D750H
D270H	D510H	D800H
D300H	D540H	D850H
D330H	D570H	D900H
D360H	D600H	D1000H
D390H	D630H	D1250H
D420H	D660H	D1400H
D450H	D700H	D1700H

Stock Widths* 3/4 inch=075, 1 inch=100, 1-1/2 inch=150, 2 inches=200, 3 inches=300

*Stock Widths: Use the three-digit size number as a suffix to the belt number when ordering. For nonstock sizes, contact your local Goodyear Industrial Products Distributor. Note: Other sizes available upon request.