


# Stripwound Metal Hose (Products)

## TAR & ASPHALT

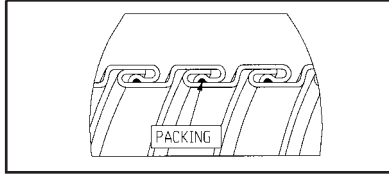

**Tar and Asphalt** is Hose Master's heavy-weight interlocked metal hose. Constructed from a single strip of galvanized steel with Hose Master's proprietary packing, this hose is ideal for transferring high-temperature viscous fluids. Tar and Asphalt hose is leak resistant and handles maximum suction. It is design tested to 100 psi and has a temperature range of -40° F to 500° F.

Explanation of **Tar and Asphalt** Part Numbers:

TA    30    GS  
       Strip    Material  
       Thickness    Code

**Strip Thicknesses:**

30 - Extra Heavy Weight

**Material Codes:**

GS - Galvanized Steel

Diameter (inches)	Minimum Bend Radius (inches)	Weight Per Foot (lbs.)
1 1/2	9	1.8
2	12	2.2
2 1/2	15	2.8
3	17	3.2
4	22	4.2

Notes: Other diameters are available upon request. Minimum bend radius is measured from the centerline of the hose.

## TAR & ASPHALT FITTINGS



*Heavy duty packed-on reusable rigid male or female swivel fittings can be attached upon request. Please refer to page 53 for fitting details.*

Stripwound Metal Hose

