



Anti-Slip Floor Coatings

- Chemical resistance
- Designed to increase the Coefficient of Friction (COF)
- Exceeds OSHA COF recommendations
- Reduce slips and falls in the workplace




ANTI-SLIP COATINGS

Helpful Hints:

- Most formulas can be rolled, sprayed, or troweled
- Finished flooring is easily cleaned with a biodegradable cleaner/degreaser
- Remove any oil, grease, dirt or water prior to application
- Test for the presence of water to determine if floor can be coated
- It is always recommended that a primer be used. Primers increase adhesion to the substrate and also seal porosity when applying on concrete

Solution

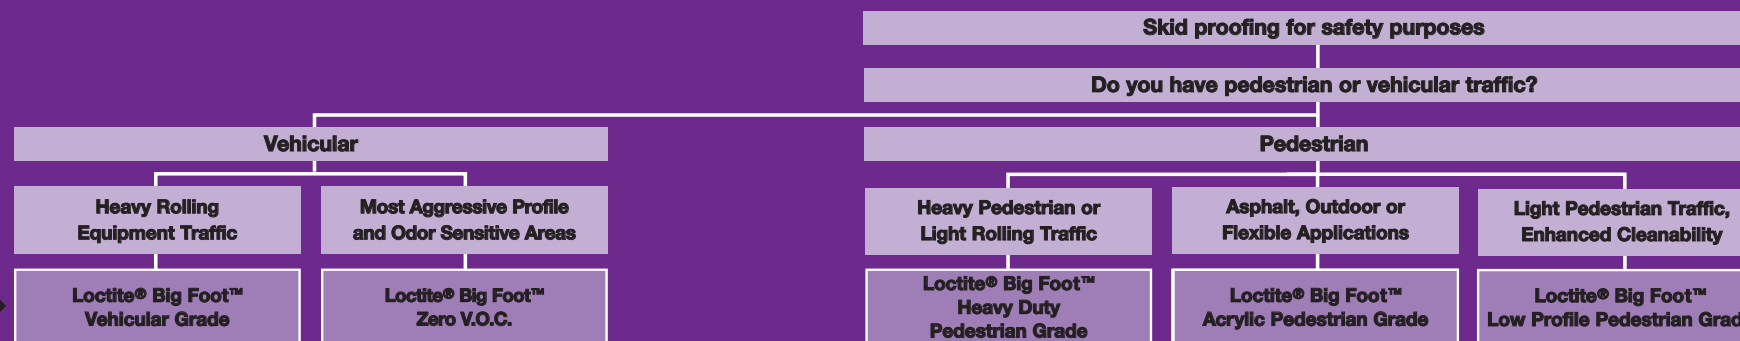


	Black or Grey	Grey or Black	Black, Grey or Safety Yellow	Grey	Safety Yellow
Color	Black or Grey	Grey or Black	Black, Grey or Safety Yellow	Grey	Safety Yellow
Coefficient of Friction (Dry/Wet)	1.05/1.05	1.10/1.00	1.17/1.00	1.30/0.90	0.78/0.86
Coverage per Gallon (ft.²/meter²)	40 ft. ² (3.7 m ²)	35 ft. ² (3.3 m ²)	50 ft. ² (4.7 m ²)	70 ft. ² (6.5 m ²)	90 ft. ² (8.3 m ²)
Working Time	4 hr.	1 hr.	N.A.	N.A.	1 hr.
Drying Time (Light Pedestrian Traffic/Heavy Pedestrian Traffic)	12/72 hr.	24/72 hr.	12/72 hr.	4/24 hr.	24/72 hr.
Common Sizes / Part Number	1 gallon kit black – 96221 1 gallon kit grey – 96251 5 gallon kit grey – 96255	1 gallon kit grey – 39915 1 gallon kit black – 96231	1 gallon kit black – 96211 1 gallon kit grey – 96261 5 gallon kit grey – 96265 1 gallon kit safety yellow – 40302 5 gallon kit safety yellow – 40303	1 gallon kit – 95591	1 gallon kit – 40352

Additional Products			
Name	Used on or with	Part #	Pkg. Size
Loctite® Big Foot™ Metal Primer	Metal	96132	1 gallon kit
Loctite® Big Foot™ Acrylic Primer	Loctite® Big Foot™ Acrylic Pedestrian Grade	95581	1 gallon kit
Loctite® Big Foot™ Water-Based Primer/Sealer	Porous Surfaces (ex. Concrete, wood, tile)	94142	1 gallon kit
Loctite® Mixer Blades	To mix all 1 gallon kits of Loctite® Big Foot™ flooring compounds	96131	1 blade
Loctite® Phenolic Rollers	Loctite® Big Foot™ Low Profile, Heavy Duty, Vehicular and Zero V.O.C. grade products	96121	1 roller
	Loctite® Big Foot™ Acrylic Pedestrian, Acrylic Primer.		



Loctite® Big Foot™ Vehicular Grade
Withstands even the heaviest rolling equipment traffic. Resists liquids as harsh as jet fuels and hydraulic fluids. Superior adhesion




Loctite® Big Foot™ Zero V.O.C.
This 100% reactive, solvent-free epoxy has the most aggressive profile in the Big Foot™ line. Use in odor-sensitive areas such as



Loctite® Big Foot™ Heavy Duty Pedestrian Grade
For areas with heavy pedestrian or light rolling traffic. Ideal for ramps, walkways, locker rooms,



Loctite® Big Foot™ Acrylic Pedestrian Grade
A single-component, elastomeric, anti-slip floor and deck coating for optimum adhesion to asphalt and flexible applications. Best for

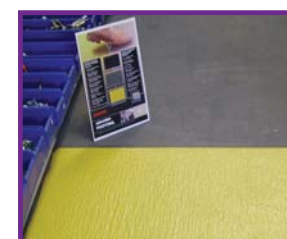

Loctite® Big Foot™ Low Profile Pedestrian Grade
A single-component, epoxy non-slip floor and deck coating. Resists gasoline, oil, acids, alkalis, and aliphatic solvents. Fire retardant when cured.



Call Toll Free: 1-866-711-4673
WebSales@GoodyearRubberProducts.com

We Ship World Wide