


# Pex Fittings

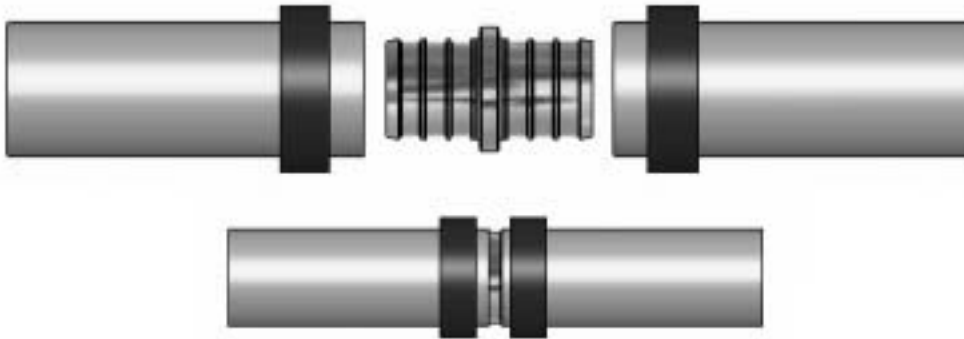

**•Use With**

Pex Tubing in accordance with ASTM F-876 and F-877

**•Pressure ad Temperature**

160 PSI @ 73°F  
 100 PSI @ 180°F  
 80 PSI @ 210°F

**•Vibration**

Excellent resistance

**•Material**

Forged brass CA36500  
 ( Low lead )


**•Typical Applications**

Potable cold and hot domestic water, hydronic heating systems radiant heating systems.

**•Conformance**

Produced to ASTM F1807  
 ASNI/ NSF61/ 14 Certified  
 IAPMO Listed ( UPC )  
 CSA B 137.5 Listed  
 Adapter threads to ANSIB1.20.1  
 Adapter solder ends to ANSI B16.18  
 All CNC machined ends.

**Actual outside diameters of Pex tubing**

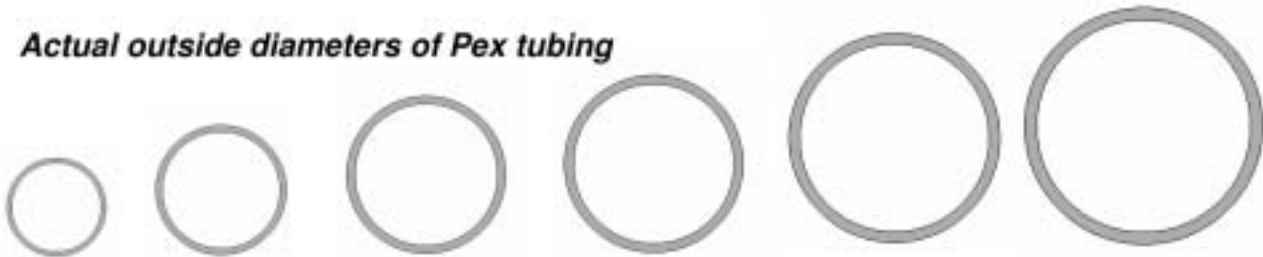

**Actual size Pex ends**



3/8"

1/2"

5/8"

3/4"

1

1 1/4"

