



- **Sales Tip:** Rubber top resists exposure to sparks from welding. Easy to clean non-directional top surface. Ideal for multi-shift environments.
- **Where to Specify:** Welding locations; work cells that are subjected to extreme traffic.

- One of the 4 most comfortable mats available for dry area applications.
- Pebble-embossed top surface of resilient SBR rubber is combined with dense closed cell foam base utilizing NOTRAX® exclusive UniFusion™ technology.
- UniFusion™ bond guaranteed for the life of the mat – See warranty for details
- Overall mat thickness is a full ONE-INCH.
- Sloped beveled foam on all 4 undersides affords easy access onto and off of mat.
- Manufacturer's warranty of 3 years is provided.
- Custom widths available



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NOTRAX® INDUSTRIAL MATS

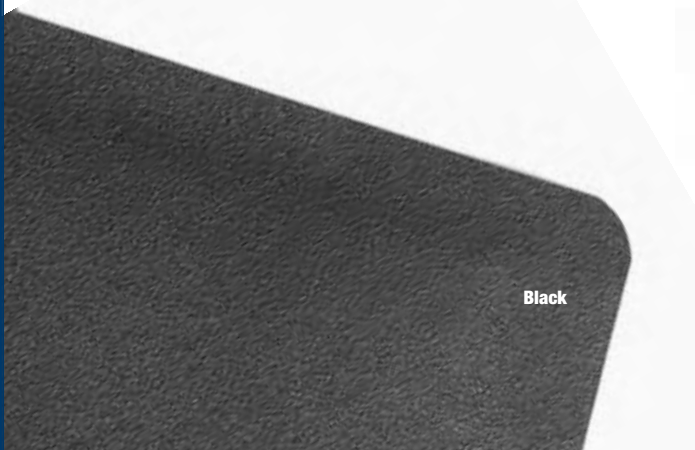

Black

#980 PEBBLE TRAX® GRANDE™

Stock Sizes	2' x 3'	3' x 5'	3' x 12'	Custom Widths		
List Price	\$71.64	\$179.10	\$429.84	\$14.33/sq.ft.		
Weight (lbs.)	12	30	72	2.0/sq.ft.		
Roll Sizes & Custom Sizes	2' x 75'	3' x 75'	4' x 75'	2' Widths	3' Widths	4' Widths
List Price	\$1791.00	\$2686.50	\$3582.00	\$11.94/sq.ft.	\$11.94/sq.ft.	\$11.94/sq.ft.
Weight (lbs.)	300	450	600	2.0/sq.ft.	2.0/sq.ft.	2.0/sq.ft.

Shipping Location: Superior Manufacturing Group - Moselle, MS 39459

* For applications on carpeted, finished or polished surfaces, Mat Hold (090 - pg.59) is recommended to minimize mat movement

