



SPIRALITE® 1200


CORRUGATED RUBBER DUCT HOSE

NOMINAL SIZE	inch	2"	2 1/2"	3"	4"	5"	6"	8"
APPROX. O.D.	inch	2.37	2.91	3.48	4.55	5.65	6.78	8.87
RECOMMENDED W.P. AT 68°F	psi	35	30	30	25	25	25	20
VACUUM RATING AT 68°F	in/HG	28	28	28	25	25	25	25
RECOM. MIN. BEND RADIUS AT 68°F*	inch	4	5	6	9	10	12	17
APPROX. B.P. AT 68°F	psi	105	90	90	75	75	75	60
APPROX. WT.	lbs./ft.	.49	.66	.91	1.36	2.08	2.86	4.23

* BEND RADIUS FOR CONTINUOUS SERVICE.

- **APPEARANCE/CONSTRUCTION:**
Rubber tube with black PVC helix.
Corrugated cover, smooth interior.
- **BENEFITS:**
 - Lightweight and durable.
 - Static-dissipating tube.
- **GENERAL APPLICATIONS:**
 - Material handling.
 - Air, abrasive dust ducting.
 - Light abrasive suction.
- **TEMPERATURE RANGE:**
-30°F to +140°F
- **STANDARD LENGTHS:**

2" thru 6"	100ft.
8"	50ft.

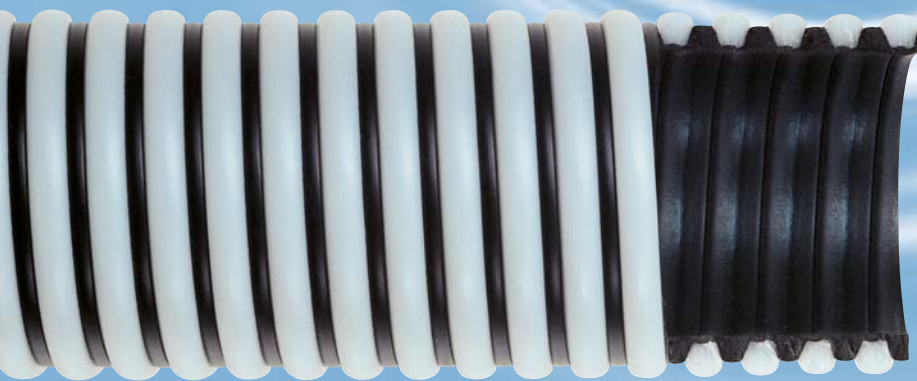

SPIRALITE® 2000

EPDM RUBBER SUCTION HOSE

NOMINAL SIZE	inch	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	6"
APPROX. O.D.	inch	1.34	1.61	1.96	2.49	3.00	3.60	4.69	6.86
RECOMMENDED W.P. AT 68°F	psi	80	70	60	60	50	50	45	35
VACUUM RATING AT 68°F	in/HG	28	28	28	28	28	28	28	20
RECOM. MIN. BEND RADIUS AT 68°F*	inch	4	5	6	9	11	12	17	27
APPROX. B.P. AT 68°F	psi	240	210	180	180	150	150	135	105
APPROX. WT.	lbs./ft.	.23	.30	.49	.69	.91	1.03	1.81	3.84

* BEND RADIUS FOR CONTINUOUS SERVICE.

- **APPEARANCE/CONSTRUCTION:**
Black EPDM rubber tube with natural poly-ethylene helix.
Corrugated wall, smooth interior.
- **BENEFITS:**
 - Excellent flexibility and durability.
 - Good chemical resistance (see chemical resistance chart).
- **GENERAL APPLICATIONS:**
 - Transferring light chemical and fertilizer solutions.
 - Septic service.
 - Transferring light abrasives.
- **TEMPERATURE RANGE:**
-30°F to +140°F
- **STANDARD LENGTHS:**

1" thru 6"	100ft.
------------	--------