



SPIRALITE® W145

ALL-CLEAR PVC CORRUGATED FOOD GRADE SUCTION HOSE WITH STATIC WIRE


- **APPEARANCE/CONSTRUCTION:**
Clear PVC tube and helix.
Corrugated wall, smooth interior.
Static-conductive wire.
- **BENEFITS:**
 - Lightweight and highly flexible.
 - Non-toxic PVC conforms to FDA standards.
 - All clear construction allows easy material inspection.
- **GENERAL APPLICATIONS:**
 - Pneumatic conveying powder, pellets and granular materials.
- **TEMPERATURE RANGE:**
-10°F to +130°F
- **STANDARD LENGTHS:**
1-1/4" thru 6" 100ft.

NOMINAL SIZE	inch	1-1/4"	1-1/2"	45mm	2"	57mm	2-1/2"	3"	4"	5"	6"
APPROX. O.D.	inch	1.61"	1.82	2.13	2.37	2.67	3.01	3.05	4.54	5.73	6.98
RECOMMENDED W.P. AT 68°F	psi	50	50	40	40	40	40	35	35	30	35
VACUUM RATING AT 68°F	in/HG	28	28	28	28	28	28	28	28	24	28
RECOM. MIN. BEND RADIUS AT 68°F*	inch	3	3	4	4	4	5	6	8	11	15
APPROX. B.P. AT 68°F	psi	100	100	120	120	120	120	105	105	90	105
APPROX. WT.	lbs./ft.	.32	.38	.51	.58	.64	.79	1.06	1.68	2.34	4.13

** ** *

* BEND RADIUS FOR CONTINUOUS SERVICE.

** 5" AND 6" WILL HAVE WHITE HELIX

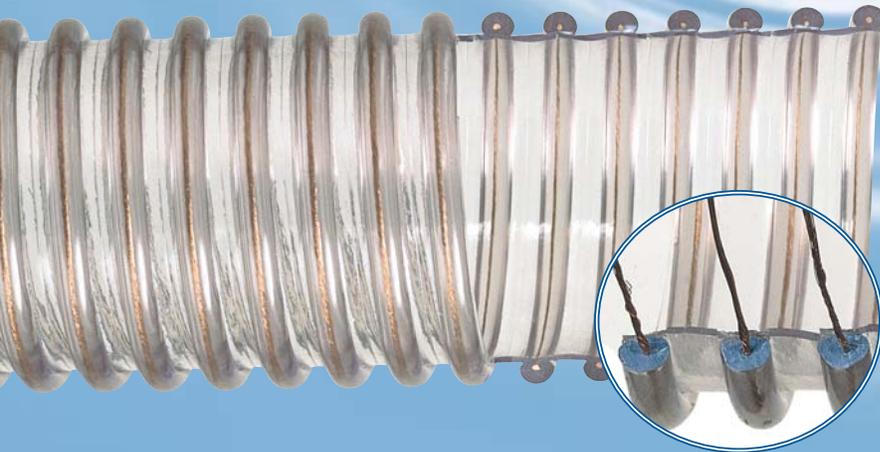

SPIRALITE® W185

ALL-CLEAR PVC CORRUGATED FOOD GRADE DUCT HOSE WITH STATIC WIRE

- **APPEARANCE/CONSTRUCTION:**
Clear PVC tube and helix.
Corrugated wall, smooth interior.
Static-conductive wire.
- **BENEFITS:**
 - Lightweight and highly flexible.
 - Non-toxic PVC conforms to FDA standards.
 - All clear construction allows easy material inspection.
- **GENERAL APPLICATIONS:**
 - Low-volume conveying of powder and pellets.
- **TEMPERATURE RANGE:**
-10°F to +130°F
- **STANDARD LENGTHS:**
1-1/2" thru 6" 100ft.

NOMINAL SIZE	inch	1 1/2"	39mm	45mm	2"	57mm	2 1/2"	3"	4"	5"	6"
APPROX. O.D.	inch	1.87	1.91	2.20	2.44	2.69	2.98	3.53	4.58	5.62	6.67
VACUUM RATING AT 68°F	in/HG	28	28	28	28	28	28	28	28	28	28
RECOM. MIN. BEND RADIUS AT 68°F*	inch	2	2	2	2	3	3	3	4	4	5
APPROX. WT.	lbs./ft.	.36	.36	.45	.58	.53	.61	.85	1.13	1.55	1.88

* BEND RADIUS FOR CONTINUOUS SERVICE.