


## ® SUN-FLOW SF-60

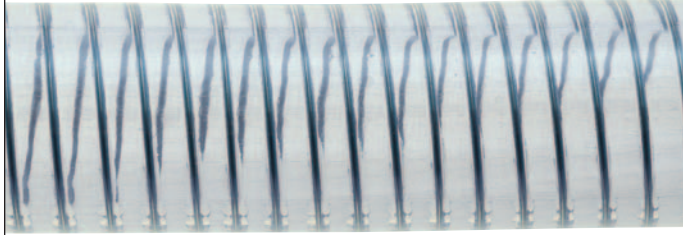


### Code: SF-60 P.V.C. SPRING WIRE SUCTION HOSE

- APPLICATIONS: Food and Beverage Dispensing  
Coolant, Non-Toxic formulation  
conforming to FDA requirements.
- CONSTRUCTION: One Spring Wire, Clear PVC Wall.
- TEMPERATURE RANGE: 20°F to 150°F
- CAUTION: For liability purposes, if temperature  
exceeds 110°F the working pressure  
will go down. Please check with  
factory to ensure sufficient safety factor.

I.D.	O.D.	MAX.W.P. at 70°F psi	LENGTH	APPROX. WT.
1/4"	1/2"	210	100 ft	9 lbs
3/8"	5/8"	180	100 ft	12 lbs
1/2"	13/16"	150	100 ft	21 lbs
5/8"	1"	100	100 ft	32 lbs
3/4"	1-1/8"	100	100 ft	36 lbs
1"	1-3/8"	84	100 ft	47 lbs
1-1/4"	1-3/4"	84	50 ft	39 lbs
1-1/2"	2"	84	50 ft	43 lbs
2"	2-1/2"	70	50 ft	56 lbs

## ® SUN-FLOW SF-70

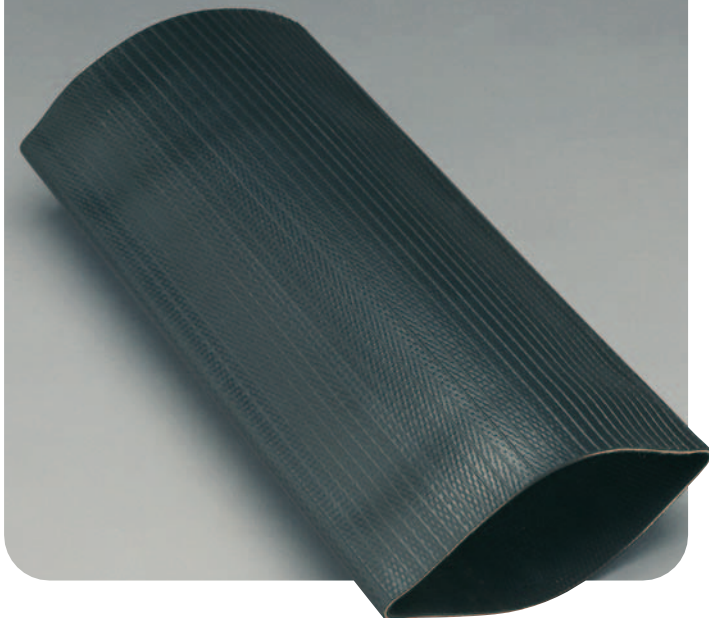

### Code: SF-70 Circular Woven Nitrile Rubber Black

NOMINAL SIZE	THICKNESS	WEIGHT lbs/ft	WORKING PRESSURE	END PULL
1-1/2"	0.08"	0.21 lbs	150 psi	1,980 lbs
2"	0.08"	0.30 lbs	150 psi	2,860 lbs
3"	0.10"	0.46 lbs	150 psi	3,960 lbs
4"	0.10"	0.64 lbs	150 psi	5,280 lbs
6"	0.12"	1.11 lbs	150 psi	11,000 lbs
8"	0.12"	1.51 lbs	150 psi	14,520 lbs

- COVER: NBR Ribbed. Resistant to oil, abrasion and weathering.
- TEMP. RANGE: -20°F to 200°F
- APPLICATION: Industrial wash down, Pump discharge,  
submersible pump discharge, Bypass systems,  
Irrigation/Watering, Fertilizer distribution, Cable cover,  
Pollution control flotation, Limited oil & Chemical use,  
Dewatering jetting.
- STND. LENGTH: 200 ft.