


**Female Connector 66PL**


PART NO.	TUBE SIZE	PIPE THREAD (NPTF)	L	D
66PL-2-2	1/8	1/8	1.18	.094
66PL-3-2	3/16	1/8	1.16	.156
66PL-5/32-2	5/32	1/8	1.18	.125
66PL-5/32-4	5/32	1/4	1.39	.125
66PL-4-2	1/4	1/8	1.21	.188
66PL-4-4	1/4	1/4	1.42	.188
66PL-5-2	5/16	1/8	1.27	.250
66PL-5-4	5/16	1/4	1.47	.250
66PL-6-4	3/8	1/4	1.46	.312
66PL-6-6	3/8	3/8	1.51	.312

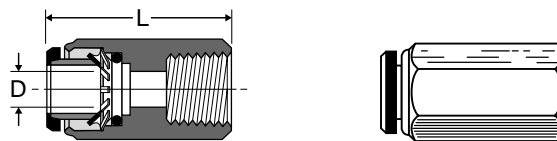

**B**

**Female Bulkhead 66PLBH**


PART NO.	TUBE SIZE	PIPE THREAD (NPTF)	C HEX	P MAX.	L	FLOW DIA. D	BULKHEAD HOLE DIA.
66PLBH-5/32-4	5/32	1/4	11/16	.24	1.38	.13	1/2
66PLBH-4-4	1/4	1/4	11/16	.19	1.35	.18	9/16
66PLBH-6-6	3/8	3/8	1	.22	1.44	.31	7/8
66PLBH-8-6	1/2	3/8	1 1/4	.35	1.57	.34	1

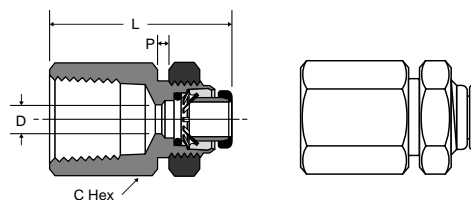

**Tube End Reducer 67PPL**

Plastic Body


PART NO.	1 TUBE SIZE	2 TUBE SIZE	L	D
67PPL-2-5/32	1/8	5/32	1.48	.078
67PPL-2-4	1/8	1/4	1.48	.078
67PPL-5/32-4 *	5/32	1/4	1.48	.118
67PPL-5/32-5 *	5/32	5/16	1.41	.118
67PPL-5/32-6 *	5/32	3/8	1.63	.118
67PPL-4-5	1/4	5/16	1.52	.177
67PPL-4-6	1/4	3/8	1.64	.177
67PPL-4-8	1/4	1/2	1.72	.177
67PPL-5-6 *	5/16	3/8	1.79	.236
67PPL-6-8	3/8	1/2	1.92	.295

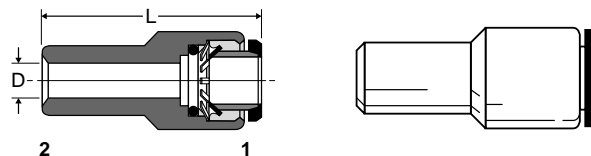

\* Parts supplied with black bodies and black release buttons

**Male Connector W68PL**

PART NO.	TUBE SIZE	PIPE THREAD (NPTF)	C HEX	L	M	D
W68PL-2-1	1/8	1/16	3/8	.85	.68	.094
W68PL-2-2	1/8	1/8	7/16	.85	.68	.094
W68PL-2-4	1/8	1/4	9/16	1.10	.68	.094
W68PL-3-2	3/16	1/8	7/16	.91	.63	.156
W68PL-3-4	3/16	1/4	9/16	1.10	.64	.156
W68PL-5/32-2	5/32	1/8	7/16	.85	.69	.125
W68PL-5/32-4	5/32	1/4	9/16	1.10	.69	.125
W68PL-4-1	1/4	1/16	1/2	1.15	.71	.140
W68PL-4-2	1/4	1/8	1/2	.97	.71	.188
W68PL-4-4	1/4	1/4	9/16	1.10	.71	.188
W68PL-4-6	1/4	3/8	3/4	1.14	.71	.188
W68PL-5-2	5/16	1/8	9/16	1.23	.78	.234
W68PL-5-4	5/16	1/4	9/16	1.11	.78	.250
W68PL-5-6	5/16	3/8	11/16	1.12	.79	.250
W68PL-6-2	3/8	1/8	5/8	1.26	.78	.234
W68PL-6-4	3/8	1/4	5/8	1.14	.78	.312
W68PL-6-6	3/8	3/8	11/16	1.09	.79	.312
W68PL-6-8	3/8	1/2	7/8	1.34	.78	.312
W68PL-8-4	1/2	1/4	13/16	1.52	.87	.344
W68PL-8-6	1/2	3/8	13/16	1.31	.87	.344
W68PL-8-8	1/2	1/2	7/8	1.43	.87	.375
68PL-5/32-4LT*	5/32	1/4-28	7/16	.88	.69	.093

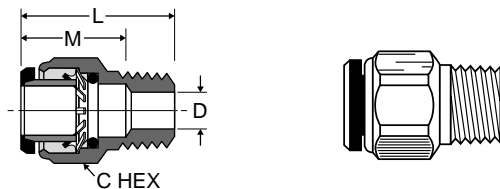

\* SAE-LT Threads