


Parker 273

Meets or exceeds the requirements of SAE J1402 Table A, and Dept. of Transportation FMVSS 106-74, Type A2.

PART NO.	HOSE SIZE	HOSE I.D.	HOSE O.D.	MIN. BURST PRESS.	MAX. WORKING PRESS.	MIN. BEND RADUS	APPROX. WT. LBS./FT.
273-6	-6	3/8	.750	900	225	1.75	.204
273-8	-8	1/2	.875	900	225	2.00	.252

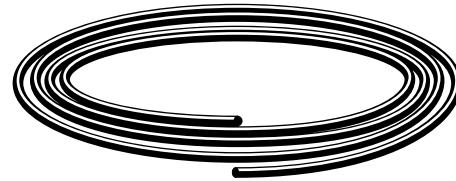

Construction

Tube - Synthetic rubber. Reinforcement - One or more fabric braids or spirals. Cover - Abrasion, oil and age resistant synthetic rubber.

Identification

Stratoflex, part number, and appropriate SAE and DOT markings.

Application

Air brake systems.

Temperature range

-40°F thru +200°F (-40°C thru +93°C)

Assembly instructions

1. Slide nut onto hose.
2. Slide sleeve onto hose with tapered edge toward fitting body (see example).
3. Bottom hose into fitting.
4. Tighten nut until it contacts body hex.

Note: When reassembling fitting, body and nut should be inspected. Only reuse if parts are in proper condition. Sleeves should never be reused.

