


Female/Female, Straight Thread O-Ring Port XV506SS

PART NO.	STRT. THREAD	B HEX	C HEX	H	L	M	N	D FLOW Ø
XV506SS-4	7/16-20	15/16	15/16	4.00	5.10	2.17	2.52	.375
XV506SS-6	9/16-18	15/16	15/16	4.00	5.10	2.17	2.52	.375
XV506SS-8	3/4-16	1-1/16	1-1/16	4.00	5.25	2.47	2.70	.500
XV506SS-12	1-1/16-12	1-1/4	1-5/16	5.00	6.67	3.35	3.42	.787
XV506SS-16	1-5/16-12	1-1/2	1-9/16	5.00	6.77	3.54	3.81	1.000

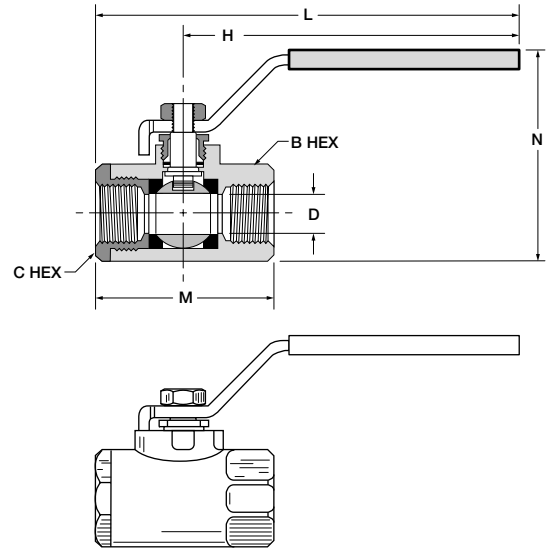

Female/Female, Straight Thread O-Ring Port XV506SS-20, XV506SS-24, XV506SS-32

PART NO.	STRT. THREAD	B HEX	C HEX	H	L	M	N	D FLOW Ø
XV506SS-20	1 5/8-12	1.93	1.93	7.00	9.000	4.000	3.27	1.25
XV506SS-24	1 7/8-12	2.13	2.13	7.00	9.185	4.375	3.45	1.50
XV506SS-32	2 1/2-12	2.85	2.85	7.00	9.750	5.500	3.81	2.00

