


**Angle Needle Valve NV101F**

Flare to Male Pipe  
 Temperature Range: -45° to +250° F


PART NO.	TUBE SIZE	PIPE THREAD	H	L	M	N
NV101F-4-2	1/4	1/8	1.50	1.58	.75	.66
NV101F-6-4	3/8	1/4	1.38	1.86	.95	.90

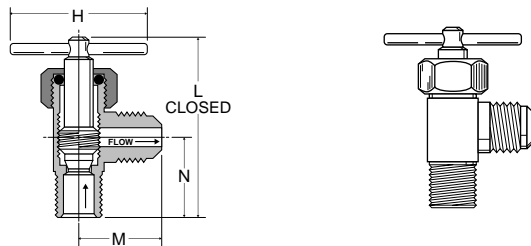

**Needle Valve NV102F**

Flare to Flare \*Provided with Pin Handle  
 Temperature Range: -45° to +250° F


PART NO.	TUBE SIZE	H	L	M
NV102F-4*	1/4	1.50	1.34	1.50
NV102F-6	3/8	1.38	1.55	1.86

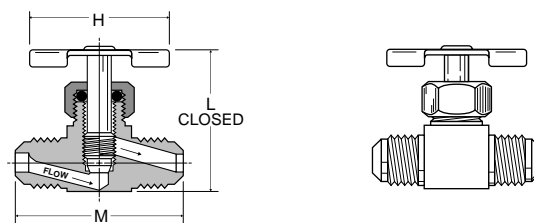

**Needle Valve NV103F**

Flare to Male Pipe \*Provided with Pin Handle  
 Temperature Range: -45° to +250° F


PART NO.	TUBE SIZE	PIPE THREAD	H	L	M
NV103F-4-2*	1/4	1/8	1.50	1.33	1.35
NV103F-6-4	3/8	1/4	1.38	1.56	1.73

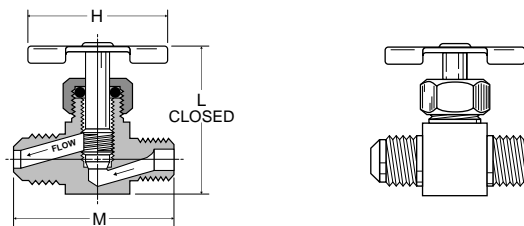

**Humidifier Valve HV104C**

Temperature Range: -45° to +250° F


PART NO.	TUBE SIZE	PIPE THREAD	H	L	M
HV104C-4-2	1/4	1/8	1.50	1.89	.53

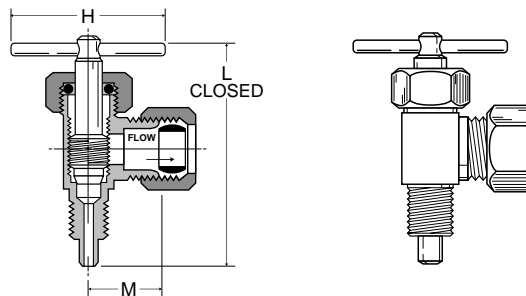

**Humidifier Valve clamp kit HV104C-kit**

Temperature Range: -30° to +250° F  
 Clamp fits 3/8" O.D. through 1.315" O.D. tube or pipe. Kit includes 60PT-4 and 63PT-4 for assembly with plastic or nylon tubing. For complete kit, specify entire part number as shown below:

PART NO.	TUBE SIZE	PIPE THREAD
HV104C-4-2 KIT	1/4	1/8



J