

HEATER & COOLANT HOSES

6621 X-treme Plus SF Series

The Super Flexible hose is a coolant/heater hose that is mandrel made in continuous lengths up to 130 feet, the longest length and most flexible silicone hose available in the industry. This hose is resistant to coolant solutions, cracking, ozone, cold leaks, peeling and aging. This product is made for extreme applications that require tight bends for connections between the radiator and the engine on heavy-duty equipment, buses, trucks, etc. The X-treme Plus SF has a Greek corrugated construction that allows this hose to be flexible enough to replace pre-formed elbows.

TUBE COLOR: Black

REINFORCEMENT: High-temperature-resistant plies with helical wire

COVER COLOR: Red Greek Corrugated


BRANDING: PARKER SILICONE SERIES 6621 -76° to +392°F (DATE CODE) MADE IN ITALY

TEMP. RANGE: -76° to +392°F

APPLICATIONS: Coolant and heater lines

SPECIFICATIONS: Meets or exceeds performance criteria of SAE J20R2, ISO 1307-1997

MAX. WORKING PRESSURE: 1/3 of the Burst Pressure

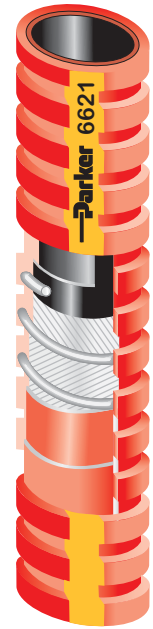

PART NUMBER	SIZE INCH	INSIDE DIAMETER		OUTSIDE DIAMETER		LENGTH FT	BURST PRESSURE PSI	WEIGHT LBS/100FT	BEND RADIUS	
		INCH	MM	INCH	MM				INCH	MM
6621-0500025	1/2	0.512	13	0.906	23	25	225	20	1.4	35
6621-0500130	1/2	0.512	13	0.906	23	130	225	20	1.4	35
6621-0594130	19/32	0.591	15	0.984	25	130	225	21	1.8	45
6621-0625025	5/8	0.630	16	1.024	26	25	225	22	1.8	45
6621-0625130	5/8	0.630	16	1.024	26	130	225	22	1.8	45
6621-0688130	11/16	0.709	18	1.102	28	130	225	23	1.8	45
6621-0750025	3/4	0.748	19	1.142	29	25	225	24	2.0	50
6621-0750130	3/4	0.748	19	1.142	29	130	225	24	2.0	50
6621-0813130	13/16	0.787	20	1.181	30	130	225	25	2.0	50
6621-1000025	1	0.984	25	1.378	35	25	225	30	2.0	50
6621-1000130	1	0.984	25	1.378	35	130	225	30	2.0	50
6621-1125130	1-1/8	1.102	28	1.496	38	130	225	33	2.6	65
6621-1188130	1-3/16	1.181	30	1.575	40	130	225	35	3.0	75
6621-1250025	1-1/4	1.260	32	1.693	43	25	225	40	3.1	80
6621-1375025	1-3/8	1.378	35	1.811	46	25	225	43	3.7	95
6621-1500025	1-1/2	1.496	38	1.929	49	25	225	46	3.9	100
6621-1625130	1-5/8	1.654	42	2.087	53	130	225	49	4.7	120
6621-1750025	1-3/4	1.772	45	2.205	56	25	225	54	5.1	130
6621-2000025	2	2.008	51	2.480	63	25	225	88	5.9	150
6621-2188130	2-3/16	2.165	55	2.638	67	130	225	95	7.1	180
6621-2250130	2-1/4	2.283	58	2.756	70	130	225	99	7.9	200
6621-2375130	2-3/8	2.362	60	2.874	73	130	225	103	8.3	210
6621-2500130	2-1/2	2.500	64	3.012	76.5	130	225	108	8.7	220
6621-2563130	2-9/16	2.559	65	3.071	78	130	225	111	8.7	220
6621-2750130	2-3/4	2.756	70	3.307	84	130	225	133	9.8	250
6621-3000130	3	2.992	76	3.543	90	130	225	143	10.6	270
6621-3125130	3-1/8	3.150	80	3.701	94	130	225	150	11.8	300
6621-3563130	3-9/16	3.543	90	4.134	105	130	225	188	13.8	350
6621-4000130	4	4.016	102	4.567	116	130	225	210	15.7	400