

ML 6225A ARAMID REINFORCED PACKING

Construction: Multi-Lok Braid

Features: A proprietary blend of non-asbestos TEK-PRO yarns treated with PTFE throughout the packing. The PTFE suspensoid thoroughly seals and fills all voids providing better resistance to chemical attack. A light lubricant is applied under pressure to improve run-in properties. The corner tracks are made from an Aramid filament yarn to reduce extrusion and increase pressure and strength characteristics.

Equipment: Rotating and reciprocating pump and valve equipment, mixers and agitators.

Recommended For: Pulp and paper mill applications, recovery pumps, chemical applications, caustic soda. A good all-around general service chemical packing.

Service Conditions: Shaft speeds to 1885 FPM; temperatures to 550°F/260°C; pH range 3-12.

Remarks: A superior general purpose packing. The TEK-PRO yarns retain a greater volume of PTFE dispersion and are more uniformly distributed to provide longer and better sealing.



ML 6225A

ML 6402 TEK-PRO PACKING

Construction: Multi-Lok Braid

Features: This strong blend of proprietary fibers are stranded together, treated with a specially formulated blend of low-friction lubricants. An all-around excellent general service packing.

Treatment: Each strand is individually coated with a special grade flake graphite.

Equipment: For general service on rotary and reciprocating equipment.

Recommended For: Mild acids, alkalis, steam, brine, chemicals, oil.

Service Conditions: Shaft speeds to 1885 FPM; temperatures to 600°F/318 °C; pH range 3-11.



ML 6402

ML 8002 HIGH SPEED PACKING

Construction: Multi-Lok Braid


Features: PTFE fibers specially treated with finely ground particles of graphite to increase thermal conductivity and reduce thermal expansion resulting in higher shaft speeds.

Treatment: Lubricated with a proprietary high speed lubricant.

Equipment: All reciprocating and rotating shafts.

Recommended For: All corrosive applications suitable for PTFE and graphite.

Service Conditions: Shaft speeds to 4900 FPM; temperatures to 550°F/287°C; pH range 0-14.

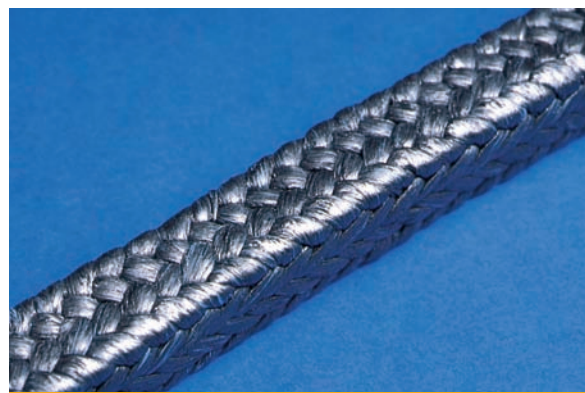

ML 8002

