


# HOW TO ORDER

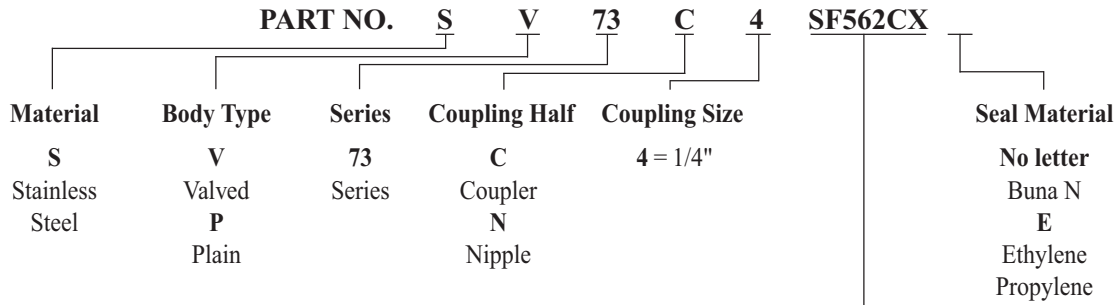

### End Fitting Type\*

Pressures to 10,000 psi (689 bar)	Pressures to 20,000 psi (1379 bar)	Pressures to 43,500 psi (3000 bar)
-4F 1/4" Female NPTF	<b>SF562CX</b> 9/16" Female Medium Pressure	<b>M562C</b> 9/16" High Pressure Male
-4EF 1/4" Female SAE	<b>SF375CX</b> 3/8" Female Medium Pressure	<b>RH9</b> 9/16" Reverse Cone
-4RP 1/4" Female British Parallel BS2779	<b>SM562CX</b> 9/16" Male Medium Pressure	<b>RH12</b> 3/4" Reverse Cone
-4M 1/4" Male NPT	<b>SM375CX</b> 3/8" Male Medium Pressure	<b>RH16</b> 1" Reverse Cone
-4EM 1/4" Male SAE		<b>F250C</b> 1/4" Female High Pressure
-6F 3/8" Female NPTF		<b>M250C</b> 1/4" Male High Pressure
-6EF 3/8" Female SAE		
-6RP 3/8" Female British Parallel BS2779		
-6M 3/8" Male NPT		
-6EM 3/8" Male SAE		

\*Other end fittings available upon request

### ! WARNING !

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND/OR PROPERTY DAMAGE.

*This document and other information from Snap-tite, Inc., its subsidiaries and authorized distributors provides product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operation conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met.*

*The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Snap-tite, Inc. and its subsidiaries at any time without notice.*



DISTRIBUTED BY:

ISO-9001 Certified



Call Toll Free: **1-866-711-4673**  
WebSales@GoodyearRubberProducts.com

**We Ship  
World Wide**